

# ToLEDo GLS 470LM 827 B22 SL

Code article 0030831


**SYLVANIA**



Compact and elegant design. Suitable replacement for halogen, incandescent and compact fluorescent lamps. Instant light at the flick of a switch. Uniform light distribution. Good colour rendering (CRI 80). Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas. Lower maintenance costs. 15,000 hours average rated life.

## Atouts techniques

### Dimensions (mm)

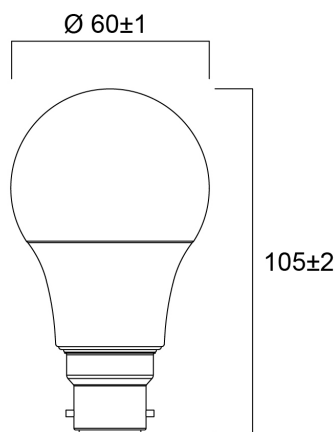

### Photométrie

# ToLEDo GLS 470LM 827 B22 SL

Code article 0030831



## Données générales

|                                  |                                     |
|----------------------------------|-------------------------------------|
| Nom du produit                   | ToLEDo GLS 470LM 827 B22 SL         |
| Technologie                      | LED                                 |
| Lamp shape                       | Pear-shape                          |
| Cap/Base                         | B22                                 |
| Lamp finish                      | Opal                                |
| Built in presence detector       | NONE                                |
| Fixture rating                   | Open                                |
| General application              | Hospitality, Residential & Consumer |
| Operating temperature range (°C) | -20°C...+40°C                       |
| Virtual assistant compatibility  | N/A                                 |
| ETIM Class                       | EC001959                            |
| Warranty                         | 3 ans                               |

## Données optiques

|                                 |           |
|---------------------------------|-----------|
| Useful luminous flux (Φuse)     | 470       |
| Température de couleur (K)      | 2700      |
| Couleur de lumière              | Homelight |
| IRC (Ra)                        | 80        |
| Colour Variation Initial (SDCM) | SDCM6     |
| Beam Angle (°)                  | 150       |
| Photobiological Risk Group      | RG1       |

## Caractéristiques électriques

|                                                   |                             |
|---------------------------------------------------|-----------------------------|
| Power consumption (W)                             | 4                           |
| Wattage (W)                                       | 4                           |
| Equivalent watt (W)                               | 40                          |
| Actuel (A)                                        | 0.04                        |
| Primary Supply/Product voltage - min (V)          | 220.0                       |
| Primary Supply/Product voltage - max (V)          | 240.0                       |
| Control gear required                             | No                          |
| Type d'appareillage                               | LED driver constant current |
| No. Of switching cycles before premature failures | >50000                      |
| Dimmable                                          | No                          |
| Dimming method                                    | N/A                         |
| Courant d'appel (A)                               | 4.5                         |
| Inrush Duration (µs)                              | 170                         |
| Lamp Energy Label (class)                         | E                           |
| Nominal Frequency (Hz)                            | 50/60Hz                     |

## Durée de vie

|                  |       |
|------------------|-------|
| Lifespan L70 B50 | 15000 |
|------------------|-------|

## Données physiques

|                               |       |
|-------------------------------|-------|
| Housing colour                | White |
| IP rating                     | IP20  |
| Nominal Product Height (mm)   | 105   |
| Nominal Product Diameter (mm) | 60    |
| Poids (kg)                    | 0.022 |

# ToLEDo GLS 470LM 827 B22 SL

Code article 0030831

**SYLVANIA**

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5410288308319  |
| Longueur simple de l'emballage (cm)  | 6.0            |
| Largeur simple de l'emballage (cm)   | 6.0            |
| Packaging single depth (cm)          | 11.2           |
| DUN14 (inner)                        | 15410288308316 |
| Units per outer package              | 6              |
| Packaging outer length / height (cm) | 18.8           |
| Packaging outer width (cm)           | 12.7           |
| Packaging outer depth (cm)           | 12.5           |

## Sécurité

|                                                 |                                            |
|-------------------------------------------------|--------------------------------------------|
| Condition de fonctionnement optimal (° C)       | -20-40                                     |
| Consignes de nettoyage en cas de bris           | Not applicable                             |
| Lampe à objectif spécial                        | No                                         |
| Utilisation pour applications sèches uniquement | Yes                                        |
| Ne convient pas à l'éclairage résidentiel       | Yes                                        |
| Safety message                                  | Not Suitable for totally enclosed fixtures |