


OPTICLIP R 600 830 2L WHT SSA01D

Code article 0034004

SYLVANIA


PROTM

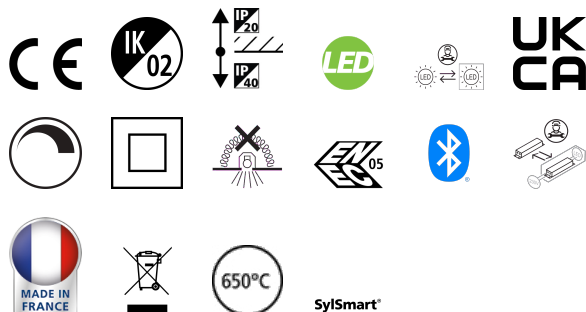

OPTICLIP R 600 830 2L WHT SSA01D is a high efficacy low glare ceiling recessed mounted luminaire with replaceable light engines for office and education applications. White colour plastic optic (reflector + lens), direct light distribution. Luminaire dimensions: 595x595x17mm. White body colour (RAL9016), IP40 (from the front), IK07, SylSmart Connected enabled with Bluetooth driver, 33.5W power consumption, 3000K (warm white) LED CCT, 4450lm luminous flux at 900mA drive current level, 133lm/W system efficacy, CRI>80, SDCM≤3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<16, luminance at 65° < 1000 cd/m2. Lifespan: 100,000 hours L80B20, photobiological safety risk group 0. Electrical protection Class II. Glow wire test 850°C.

Atouts techniques


Dimensions (mm)

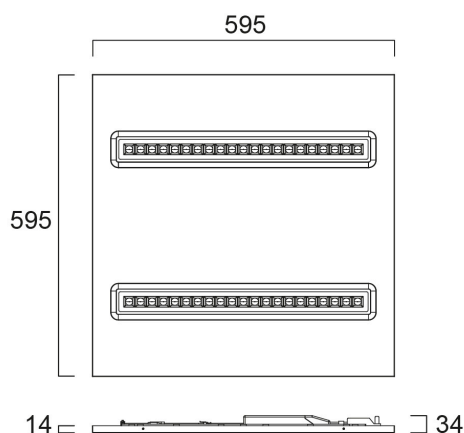

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam area [m²]	Beam flux [lm]	Beam illuminance [lx]
0.5	0.78	75.0°	0.78	0.38	1114	2930
1.0	1.56	75.0°	1.56	1.53	278	184
1.5	2.34	75.0°	2.34	2.71	123	82
2.0	3.12	75.0°	3.12	3.82	69	36
2.5	3.91	75.0°	3.91	4.91	44	20
3.0	4.69	75.0°	4.69	5.88	33	14

Distance [m] Cone diameter [m]
C0 - C180 (half beam angle: 75.0°)
C90 - C270 (half beam angle: 75.0°)



OPTICLIP R 600 830 2L WHT SSA01D

Code article 0034004

SYLVANIA

Données générales

Nom du produit	OPTICLIP R 600 830 2L WHT SSA01D
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	5°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4170617
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4450
Luminaire efficacy (lm/W)	133
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	33.5
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	900
Max. drive current (mA)	900
Drive current - Range (mA)	/ 900mA
Courant d'appel (A)	20
Inrush Duration (µs)	25
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	50
Max. products per 16A C Breaker	60
Max. products per 16A B Breaker	55
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B20	50000

OPTICLIP R 600 830 2L WHT SSA01D

Code article 0034004

SYLVANIA

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK02
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	Matt
Longueur (mm)	595
Largeur (mm)	595
Nominal Product Height (mm)	14
Poids (kg)	2.9

Emballage

Product EAN number	5410288340043
Longueur simple de l'emballage (cm)	60.0
Largeur simple de l'emballage (cm)	4.0
Packaging single depth (cm)	60.0
DUN14 (inner)	05410288340043
Units per outer package	1
Packaging outer length / height (cm)	60.0
Packaging outer width (cm)	4.0
Packaging outer depth (cm)	60.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	5-25
Utilisation pour applications sèches uniquement	No