



Code article 0034050

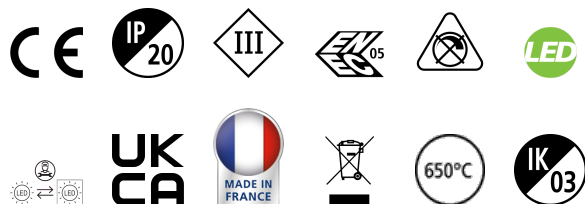

Atouts techniques

Distance [m]	Cone diameter [m]	$E(\sigma)$ $E(CR)$ $E(CO)$	$\sigma(\sigma)$ $\sigma(CR)$ $\sigma(CO)$	$\sigma(\sigma)$ $\sigma(CR)$ $\sigma(CO)$
0.5	0.78 0.78		35.0° 37.9°	8370 1302 1339
1.0	1.56 1.56		35.0° 37.9°	1342 1339 138
1.5	2.34 2.34		35.0° 37.9°	48° 148 148
2.0	3.13 3.11		35.0° 37.9°	338 83 84
2.5	3.91 3.89		35.0° 37.9°	215 83 84
3.0	4.69 4.67		35.0° 37.9°	149 83 87



OPTICLIP LIGHT E 940 WH

Code article 0034050

SYLVANIA

Données générales

Nom du produit	OPTICLIP LIGHT E 940 WH
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Office, Education
Operating temperature range (°C)	5°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC000996
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	2150
Luminaire efficacy (lm/W)	143
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	15
Primary Supply/Product voltage - min (V)	30.0
Primary Supply/Product voltage - max (V)	42.0
Electrical protection	Class III
Control gear required	No
Dimmable	No
Dimming method	N/A
Min. drive current (mA)	200
Max. drive current (mA)	450
Drive current - Range (mA)	200mA / 450mA
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	Matt
Longueur (mm)	490
Largeur (mm)	39
Nominal Product Height (mm)	14
Poids (kg)	0.23

OPTICLIP LIGHT E 940 WH

Code article 0034050

SYLVANIA

Emballage

Product EAN number	5410288340500
Longueur simple de l'emballage (cm)	55.0
Largeur simple de l'emballage (cm)	7.0
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288340507
Units per outer package	30
Packaging outer length / height (cm)	52.0
Packaging outer width (cm)	28.0
Packaging outer depth (cm)	28.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	5-25
Utilisation pour applications sèches uniquement	No