

Granit IP65 0-10V 26000lm 865 WB

Code article 0039600


SYLVANIA



Integrated LED highbay; Black aluminium housing; 25500Lm; 180 W; 142 Lm/W; 6500K; Drive current: 750mA; CRI 80; 85° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 385 x 181 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.


Atouts techniques

Dimensions (mm)

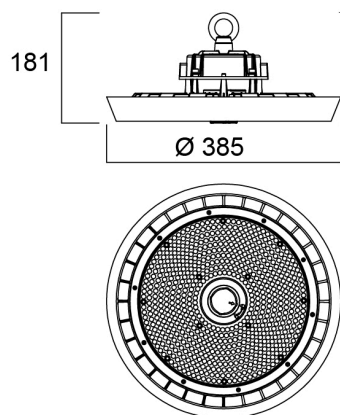

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	0.84	85°	0.84	12144
1.0	1.68	85°	1.68	3036
1.5	2.53	85°	2.53	1356
2.0	3.37	85°	3.37	756
2.5	4.21	85°	4.21	456
3.0	5.05	85°	5.05	306



Granit IP65 0-10V 26000lm 865 WB

Code article 0039600

SYLVANIA

Données générales

Nom du produit	Granit IP65 0-10V 26000lm 865 WB
Technologie	LED
Housing	Aluminium
Montage	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001716
Numéro virtuel FI	4357010
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	25500
Luminaire efficacy (lm/W)	142
Température de couleur (K)	6500
Couleur de lumière	Cool White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	180
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	0-10V
Drive current (mA)	750
Courant d'appel (A)	200
Inrush Duration (µs)	93
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	4
Max. products per 13A C Breaker	5
Max. products per 16A C Breaker	7
Max. products per 20A C Breaker	9
Max. products per 10A B Breaker	2
Max. products per 13A B Breaker	3
Max. products per 16A B Breaker	4
Max. products per 20A B Breaker	5

Durée de vie

Lifespan L80 B50	90000
Lifespan L80 B20	70000
Lifespan L80 B10	65000
Lifespan L90 B50	45000

Granit IP65 0-10V 26000lm 865 WB

Code article 0039600

SYLVANIA

Données physiques

Housing colour	Black
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	181
Nominal Product Diameter (mm)	385
Poids (kg)	4.3

Emballage

Product EAN number	5410288396002
Longueur simple de l'emballage (cm)	44.5
Largeur simple de l'emballage (cm)	44.5
Packaging single depth (cm)	19.5
DUN14 (inner)	05410288396002
Units per outer package	1
Packaging outer length / height (cm)	44.5
Packaging outer width (cm)	44.5
Packaging outer depth (cm)	19.5

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-30-50