

Granit IP65 DALI 26000lm 840 WB

Code article 0039622


SYLVANIA



Integrated LED highbay; Black aluminium housing; 26000 Lm; 185 W; 140 Lm/W; 4000K; Drive current: 3200mA; CRI 80; 85° beam angle; DALI dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 385 x 194 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.


Atouts techniques

Dimensions (mm)

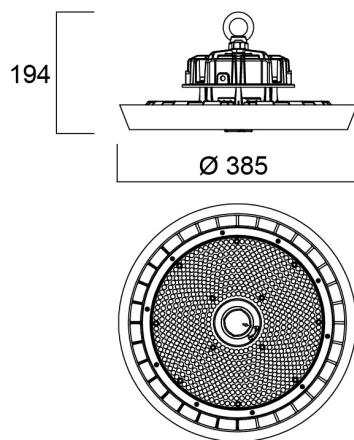

Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.85	0.85	40.2°	7500
1.0	1.69	1.69	40.2°	1875
1.5	2.54	2.54	40.2°	833
2.0	3.38	3.38	40.2°	469
2.5	4.23	4.23	40.2°	302
3.0	5.07	5.07	40.2°	206



Granit IP65 DALI 26000lm 840 WB

Code article 0039622

SYLVANIA

Données générales

Nom du produit	Granit IP65 DALI 26000lm 840 WB
Technologie	LED
Housing	Aluminium
Montage	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001716
Numéro virtuel FI	4357019
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	26000
Luminaire efficacy (lm/W)	140
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	185
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	3200
Courant d'appel (A)	92
Inrush Duration (µs)	224
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	6
Max. products per 13A C Breaker	7
Max. products per 16A C Breaker	8
Max. products per 20A C Breaker	12
Max. products per 10A B Breaker	3
Max. products per 13A B Breaker	4
Max. products per 16A B Breaker	5
Max. products per 20A B Breaker	7

Durée de vie

Lifespan L80 B50	90000
Lifespan L80 B20	70000
Lifespan L80 B10	65000
Lifespan L90 B50	45000

Granit IP65 DALI 26000lm 840 WB

Code article 0039622



Données physiques

Housing colour	Black
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	194
Nominal Product Diameter (mm)	385
Poids (kg)	4.33

Emballage

Product EAN number	5410288396224
Longueur simple de l'emballage (cm)	44.5
Largeur simple de l'emballage (cm)	44.5
Packaging single depth (cm)	19.5
DUN14 (inner)	05410288396224
Units per outer package	1
Packaging outer length / height (cm)	44.5
Packaging outer width (cm)	44.5
Packaging outer depth (cm)	19.5

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-30-50