

OTAO LINEAR INDIRECT MOD PRIS

Code article 0041813

SYLVANIA


PROTM



LED up-light module for Otao luminaires with prismatic diffuser, 3000K/4000K LED light sources included, feed by linear luminaire, 731x20x4mm dimensions.

Atouts techniques

Dimensions (mm)

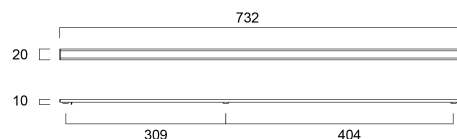

Photométrie

OTAO LINEAR INDIRECT MOD PRIS

Code article 0041813

SYLVANIA

Données générales

Nom du produit	OTAO LINEAR INDIRECT MOD PRIS
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Wall surface mounted, Suspended
Built in presence detector	NONE
General application	Office, Education, Retail, Hospitality
Operating temperature range (°C)	5°C...+50°C
Virtual assistant compatibility	N/A
ETIM Class	EC002556
Numéro virtuel FI	4170596
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1350
Luminaire efficacy (lm/W)	135
Couleur de lumière	Warm White or Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG1

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	10
Primary Supply/Product voltage - min (V)	30.0
Primary Supply/Product voltage - max (V)	38.0
Electrical protection	Class III
Control gear required	No
Dimmable	No
Dimming method	N/A
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	DC

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B50	100000

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Longueur (mm)	732
Largeur (mm)	20
Nominal Product Height (mm)	7
Poids (kg)	0.1

OTAO LINEAR INDIRECT MOD PRIS

Code article 0041813

SYLVANIA

Emballage

Product EAN number	5410288418131
Longueur simple de l'emballage (cm)	74.0
Largeur simple de l'emballage (cm)	5.0
Packaging single depth (cm)	1.0
DUN14 (inner)	15410288418138
Units per outer package	50
Packaging outer length / height (cm)	76.0
Packaging outer width (cm)	22.0
Packaging outer depth (cm)	22.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	5-50