

DELTAWING 1200 4K

Code article 0042930

SYLVANIA


PROTM



DELTAWING 1200 4K is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1160x160x60mm dimensions, 35W system power, 4,600lm flux and 131lm/W efficacy, CRI (Ra) >80, 4000K (Neutral White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, non-dimmable (4-steps DIP switch) driver (20W 2700lm, 25W 3350lm, 30W 4000lm, 35W 4600lm), RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.

Atouts techniques

Dimensions (mm)

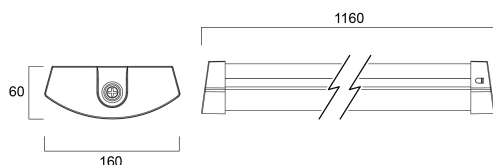


Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [ft]	Beam diameter [in]	Beam diameter [mm]	Beam diameter [cm]	Beam diameter [in]	Beam diameter [mm]
0.5	1.35	1.62	1.35	4.43	1.35	1.35	1.35	5.31	135
1.0	2.70	3.24	2.70	8.86	2.70	2.70	2.70	10.63	270
1.5	4.05	4.86	4.05	13.29	4.05	4.05	4.05	15.94	405
2.0	5.40	6.48	5.40	17.71	5.40	5.40	5.40	21.26	540
2.5	6.75	8.10	6.75	22.14	6.75	6.75	6.75	26.57	675
3.0	8.10	9.72	8.10	26.57	8.10	8.10	8.10	31.89	810

Distance [m] Cone diameter [m]
C0 - C180 (half beam angle: 113.2°)
C90 - C270 (half beam angle: 108.9°)

Illuminance [lx]



DELTAWING 1200 4K

Code article 0042930

SYLVANIA

Données générales

Nom du produit	DELTAWING 1200 4K
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling surface mounting, Wall surface mounted
Built in presence detector	NONE
General application	Office, Education, Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4279327
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4600
Luminaire efficacy (lm/W)	131
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	35
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Courant d'appel (A)	30
Inrush Duration (µs)	190
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	22
Max. products per 16A C Breaker	35
Max. products per 16A B Breaker	35
Connectable conductor cross section - Min (mm²)	1
Connectable conductor cross section - Max (mm²)	2.5

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	80000

DELTAWING 1200 4K

Code article 0042930

SYLVANIA

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP44
IK rating	IK06
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Longueur (mm)	1160
Largeur (mm)	160
Nominal Product Height (mm)	60
Poids (kg)	1.965

Emballage

Product EAN number	5410288429304
Longueur simple de l'emballage (cm)	124.6
Largeur simple de l'emballage (cm)	16.5
Packaging single depth (cm)	6.6
DUN14 (inner)	15410288429301
Units per outer package	4
Packaging outer length / height (cm)	126.0
Packaging outer width (cm)	34.5
Packaging outer depth (cm)	15.2

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-20-40