


AREUM WALL 600 D/I 4000K ALU

Code article 0042980

SYLVANIA


PROTM

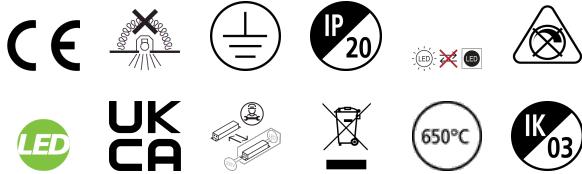

AREUM WALL 600 D/I 4000K ALU is a highly efficient wall mounted LED luminaire with 40% direct and 60% indirect light distribution. 28mm high aluminium body with rounded edges. Length 600mm, width 200mm. White aluminium RAL9006 powder coated luminaire body and powder coated steel wall mounted gearbox. Low flicker (<5%) Constant Current driver with DIP switch option. Luminous flux: 5850lm, Power consumption: 45W. Luminaire efficacy: 130lm/W. CRi (Ra)>80 4000K (Neutral White) LED, chromaticity tolerance: SDCM<3. Lifespan: L80B10 100,000h. UGR<16, Luminance at 65°<3000 cd/m². Photobiological safety risk group 0. Electrical protection: Class I. Glow Wire Test 650°C.

Atouts techniques

Dimensions (mm)

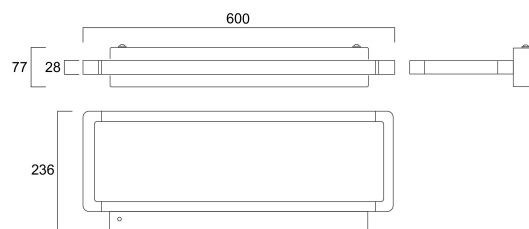


Photométrie

Distance [m]	Cone diameter [m]	E17°	E180°	E27°	E32°	E44°	E50°	E60°	E75°	E90°	E110°	E135°	E180°
0.5	0.84 0.96	4215	880	4215	4215	4215	4215	4215	4215	4215	4215	4215	4215
1.0	1.68 1.96	1079	217	1079	1079	1079	1079	1079	1079	1079	1079	1079	1079
1.5	2.52 2.94	479	96	479	479	479	479	479	479	479	479	479	479
2.0	3.36 3.92	270	54	270	270	270	270	270	270	270	270	270	270
2.5	4.20 4.90	173	35	173	173	173	173	173	173	173	173	173	173
3.0	5.04 5.88	130	26	130	130	130	130	130	130	130	130	130	130

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 90°) — C90 - C270 (Half beam angle: 90°)

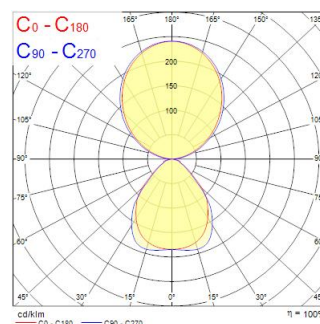

AREUM WALL 600 D/I 4000K ALU

Code article 0042980

SYLVANIA

Données générales

Nom du produit	AREUM WALL 600 D/I 4000K ALU
Technologie	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Montage	Wall surface mounted
Built in presence detector	NONE
General application	Office
Operating temperature range (°C)	5°C...+35°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4279371
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	5850
Luminaire efficacy (lm/W)	130
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	360
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	45
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	1050
Courant d'appel (A)	21.7
Inrush Duration (µs)	306
Energy Efficiency Class (A->G) of contained light source	B, C (more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	25
Max. products per 16A C Breaker	35
Max. products per 16A B Breaker	35
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	1.5

Durée de vie

Lifespan L70 B50	150000
Lifespan L80 B10	135000
Lifespan L90 B10	71000

AREUM WALL 600 D/I 4000K ALU

Code article 0042980

SYLVANIA

Données physiques

Housing colour	RAL 9006 - Aluminium
IP rating	IP20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Finition réflecteur	Not Applicable
Longueur (mm)	600
Largeur (mm)	235
Nominal Product Height (mm)	80
Poids (kg)	5.0

Emballage

Product EAN number	5410288429809
Longueur simple de l'emballage (cm)	67.5
Largeur simple de l'emballage (cm)	30.1
Packaging single depth (cm)	11.7
DUN14 (inner)	15410288429806
Units per outer package	4
Packaging outer length / height (cm)	69.0
Packaging outer width (cm)	31.6
Packaging outer depth (cm)	49.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	5-35