


SYLMIRROR LED SLIM IP44 WW

Code article 0043241

SYLVANIA


YourHome™

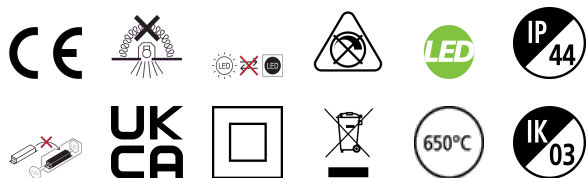

LED mirror/cabinet light with 8W total power consumption, 560 lumen, 110° beam angle, IP44, IK03, CRI 80, 3000K colour temperature, 400 mm length, 2 year warranty. Slim shape. The luminaire is controlled via the wall switch for on/off operation

Atouts techniques


Dimensions (mm)

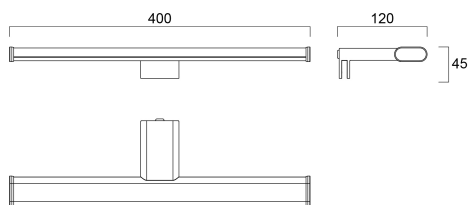

Photométrie

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.37 1.30	507 539 524
1.0	2.74 2.60	257 269 262
1.5	4.11 3.90	168 179 174
2.0	5.49 5.18	124 131 127
2.5	6.86 6.48	98 104 100
3.0	8.23 7.78	74 79 76

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (half beam angle: 104.9°)
C90 - C270 (half beam angle: 107.9°)



SYLMIRROR LED SLIM IP44 WW

Code article 0043241

SYLVANIA

Données générales

Nom du produit	SYLMIRROR LED SLIM IP44 WW
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Wall surface mounted
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Residential & Consumer
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4170557
Numéro virtuel SE	7505163
Warranty	2 ans

Données optiques

Fixture luminous flux (lm)	560
Luminaire efficacy (lm/W)	70
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Distribution type	Symmetric
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	8
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.5
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	100
Electrical protection	Class II
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	60
Courant d'appel (A)	2
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	100
Max. products per 16A C Breaker	200
Max. products per 16A B Breaker	200
Connectable conductor cross section - Max (mm²)	1.5

Durée de vie

Lifespan L70 B50	25000
------------------	-------

SYLMIRROR LED SLIM IP44 WW

Code article 0043241

SYLVANIA

Données physiques

Housing colour	Chrome
IP rating	IP44
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Longueur (mm)	400
Largeur (mm)	120
Nominal Product Height (mm)	45
Poids (kg)	0.206

Emballage

Product EAN number	5410288432410
Longueur simple de l'emballage (cm)	41.0
Largeur simple de l'emballage (cm)	13.2
Packaging single depth (cm)	5.5
DUN14 (inner)	15410288432417
Units per outer package	6
Packaging outer length / height (cm)	43.0
Packaging outer width (cm)	42.0
Packaging outer depth (cm)	13.5

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-45