

# START Panel UGR19 600x600 DALI 3600lm 840

Code article 0044628

**SYLVANIA**


**START**<sup>TM</sup>



LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<19. RG0, 90 degree beam angle , optical system: PS diffuser with Prismatic finish. Light color temperature: 4000K Neutral White, total system power: 27W , total fixture output: 3600lm, efficacy: 133 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, DALI dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables & quick connector included, 26mm nominal height, White color frame, weight: 2,07Kg.

## Atouts techniques

### Dimensions (mm)

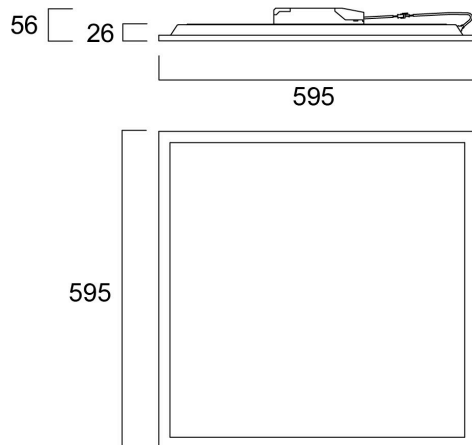


### Photométrie

0.5	0.83 0.89	E(0°) E(C90) 30.8° E(C00) 41.8°	7277 1781 152
1.0	1.59 1.72	E(0°) E(C90) 30.8° E(C00) 41.8°	1519 438 31
1.5	2.29 2.66	E(0°) E(C90) 30.8° E(C00) 41.8°	509 146 10
2.0	3.15 3.55	E(0°) E(C90) 30.8° E(C00) 41.8°	455 139 9
2.5	3.96 4.44	E(0°) E(C90) 30.8° E(C00) 41.8°	291 75 6
3.0	4.77 5.33	E(0°) E(C90) 30.8° E(C00) 41.8°	202 49 4

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 90.0°)  
— C90 - C270 (Half beam angle: 77.0°)

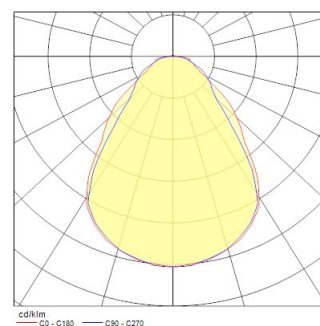

# START Panel UGR19 600x600 DALI 3600lm 840

Code article 0044628

**SYLVANIA**

## Données générales

Nom du produit	START Panel UGR19 600x600 DALI 3600lm 840
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting, Suspended
Built in presence detector	NONE
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4279388
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	133
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

## Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	27
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15.0
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	700
Courant d'appel (A)	5.6
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	37
Max. products per 13A C Breaker	48
Max. products per 16A C Breaker	59
Max. products per 20A C Breaker	74
Max. products per 10A B Breaker	37
Max. products per 13A B Breaker	48
Max. products per 16A B Breaker	59
Max. products per 20A B Breaker	74
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.75
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

# START Panel UGR19 600x600 DALI 3600lm 840

Code article 0044628

**SYLVANIA**

## Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	94000
Lifespan L80 B20	76000
Lifespan L80 B10	67000
Lifespan L90 B50	45000
Lifespan L90 B20	37000
Lifespan L90 B10	33000

## Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	PS Polystyrene
Longueur (mm)	595
Largeur (mm)	595
Nominal Product Height (mm)	26
Poids (kg)	1.942

## Emballage

Product EAN number	5410288446288
Longueur simple de l'emballage (cm)	60.3
Largeur simple de l'emballage (cm)	3.8
Packaging single depth (cm)	69.0
DUN14 (inner)	15410288446285
Units per outer package	4
Packaging outer length / height (cm)	71.4
Packaging outer width (cm)	17.6
Packaging outer depth (cm)	64.2

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-45