

START Panel Flat UGR19 600x600 840 SSH

Code article 0047040


SYLVANIA



Edge lit LED flat panel. SYLSMART Connected Building - Fully wireless, adaptive, dynamic smart system. 32 W, Neutral White, 4000 K, 3500 lumens, 109 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic driver. (HxWxD) 50 x 596 x 596 mm

Atouts techniques


Dimensions (mm)

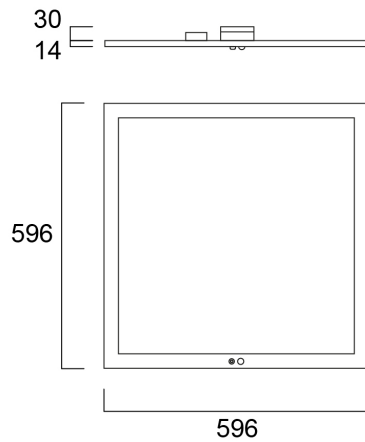

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.11	48.1°	550
1.0	2.23	48.1°	275
1.5	3.34	48.1°	183
2.0	4.46	48.1°	137
2.5	5.57	48.1°	111
3.0	6.69	48.1°	92

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 96.2°)

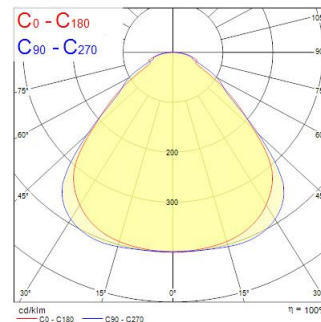

START Panel Flat UGR19 600x600 840 SSH

Code article 0047040

SYLVANIA

Données générales

Nom du produit	START Panel Flat UGR19 600x600 840 SSH
Technologie	LED
Housing	Steel
Montage	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
General application	Education, Office
Operating temperature range (°C)	-20°C...+0°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	109.3
LOR (%)	100
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	32
Actuel (A)	0.107
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected V2 (SSH)
Minimum dimming level (%)	1
Drive current (mA)	750
Courant d'appel (A)	25
Inrush Duration (µs)	177
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	53
Max. products per 13A C Breaker	69
Max. products per 16A C Breaker	86
Max. products per 20A C Breaker	107
Max. products per 10A B Breaker	31
Max. products per 13A B Breaker	41
Max. products per 16A B Breaker	51
Max. products per 20A B Breaker	64

START Panel Flat UGR19 600x600 840 SSH

Code article 0047040

SYLVANIA

Durée de vie

Lifespan L70 B50	54000
Lifespan L70 B20	54000
Lifespan L70 B10	54000
Lifespan L80 B50	54000
Lifespan L80 B20	54000
Lifespan L80 B10	54000
Lifespan L90 B50	54000
Lifespan L90 B20	54000
Lifespan L90 B10	54000

Données physiques

Housing colour	White
IP rating	IP40/20
IK rating	IK06
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Longueur (mm)	596
Largeur (mm)	596
Nominal Product Height (mm)	50
Poids (kg)	4.4
Recessed Depth (mm)	50

Emballage

Product EAN number	5410288470405
Longueur simple de l'emballage (cm)	70.0
Largeur simple de l'emballage (cm)	65.0
Packaging single depth (cm)	5.0
DUN14 (inner)	05410288470405
Units per outer package	1
Packaging outer length / height (cm)	70.0
Packaging outer width (cm)	65.0
Packaging outer depth (cm)	5.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-0