

START Waterproof Tubular 1500 IP66 6300lm 830 PC

Code article 0047151


SYLVANIA



START Waterproof Tubular is an aesthetically attractive integrated LED fixture. Easy to install with 304 stainless steel fixing brackets for ceiling mounting. Polycarbonate housing; 3000K; 50W; 6250lm; High efficiency with 125lm/W and lumen maintenance L80:B50 of 54,000 hours lifetime. IP66; IK10; Class I; 1495mm x 70mm. Can be suspended with additional accessory (SKU 0046035).

Atouts techniques


Dimensions (mm)

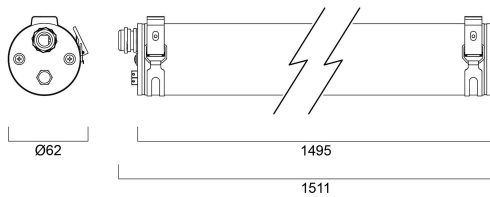

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	1.41 2.25	54°	96°	9574 590
1.0	2.81 4.48	54°	96°	1988 148
1.5	4.22 6.74	54°	96°	742 72
2.0	5.63 8.96	54°	96°	417 41
2.5	7.04 11.23	54°	96°	267 18
3.0	8.44 13.48	54°	96°	188 9

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 152.2°)
 — C90 - C270 (Half beam angle: 109.2°)

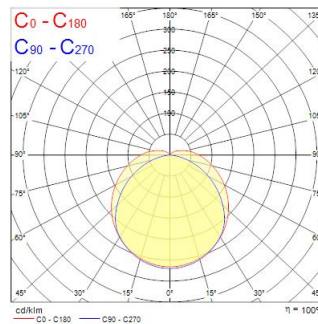

START Waterproof Tubular 1500 IP66 6300lm 830 PC

Code article 0047151

SYLVANIA

Données générales

Nom du produit	START Waterproof Tubular 1500 IP66 6300lm 830 PC
Technologie	LED
General application	Logistics & Industry
Operating temperature range (°C)	-25°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	6250
Luminaire efficacy (lm/W)	125
Température de couleur (K)	3000
IRC (Ra)	80
Beam Angle (°)	120
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	50
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Drive current (mA)	250
Courant d'appel (A)	40
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	14
Max. products per 13A C Breaker	18
Max. products per 16A C Breaker	22
Max. products per 20A C Breaker	28
Max. products per 10A B Breaker	8
Max. products per 13A B Breaker	10
Max. products per 16A B Breaker	13
Max. products per 20A B Breaker	16

Durée de vie

Lifespan L70 B50	54000
Lifespan L80 B50	54000

Données physiques

IP rating	IP66
IK rating	IK10
Longueur (mm)	1495
Largeur (mm)	70
Nominal Product Height (mm)	70
Poids (kg)	3.1

START Waterproof Tubular 1500 IP66 6300lm 830 PC

Code article 0047151

SYLVANIA

Emballage

Product EAN number	5410288471518
Longueur simple de l'emballage (cm)	163.5
Largeur simple de l'emballage (cm)	10.5
Packaging single depth (cm)	10.5
DUN14 (inner)	15410288471515
Units per outer package	2
Packaging outer length / height (cm)	165.0
Packaging outer width (cm)	23.0
Packaging outer depth (cm)	23.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-25-50