


# START Waterproof Tubular 1200 IP66 4200lm 840 PC

Code article 0047155

**SYLVANIA**


**START**<sup>TM</sup>

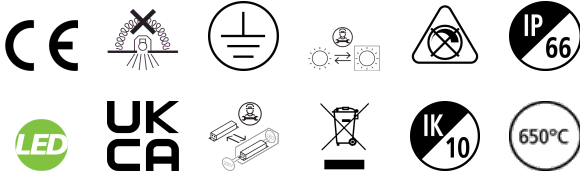


START Waterproof Tubular is an aesthetically attractive integrated LED fixture. Easy to install with 304 stainless steel fixing brackets for ceiling mounting. UV resistant Polycarbonate housing; 4000K; 35W; 4200lm; 120lm/W and lumen maintenance L870:B50 of 68,000 hours lifetime. IP66; IK10; Class I; 1190mm x 62mm. Can be suspended with additional accessory (SKU 0046035)

## Atouts techniques

### Dimensions (mm)

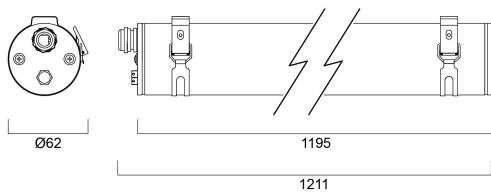

### Photométrie

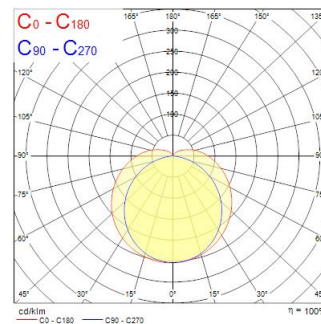

# START Waterproof Tubular 1200 IP66 4200lm 840 PC

Code article 0047155

**SYLVANIA**

## Données générales

Nom du produit	START Waterproof Tubular 1200 IP66 4200lm 840 PC
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate, Polyester
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-25°C...+50°C
Virtual assistant compatibility	N/A
ETIM Class	EC000109
Numéro virtuel FI	4357126
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	120
Température de couleur (K)	4000
Couleur de lumière	Cool White
IRC (Ra)	80
Beam Angle (°)	120
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	35
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	19
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	31
Max. products per 20A C Breaker	39
Max. products per 10A B Breaker	11
Max. products per 13A B Breaker	15
Max. products per 16A B Breaker	19
Max. products per 20A B Breaker	23
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Durée de vie

Lifespan L70 B50	68000
Lifespan L80 B50	50000
Lifespan L80 B20	42800

# START Waterproof Tubular 1200 IP66 4200lm 840 PC

Code article 0047155

**SYLVANIA**

## Données physiques

Housing colour	White
IP rating	IP66
IK rating	IK10
Longueur (mm)	1190
Nominal Product Diameter (mm)	62
Poids (kg)	1.24

## Emballage

Product EAN number	5410288471556
Longueur simple de l'emballage (cm)	127.5
Largeur simple de l'emballage (cm)	7.7
Packaging single depth (cm)	7.7
DUN14 (inner)	15410288471553
Units per outer package	6
Packaging outer length / height (cm)	130.0
Packaging outer width (cm)	25.1
Packaging outer depth (cm)	17.8

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-25-50