


START Panel Flat UGR19 625x625 4000Lm 840

Code article 0047245


SYLVANIA

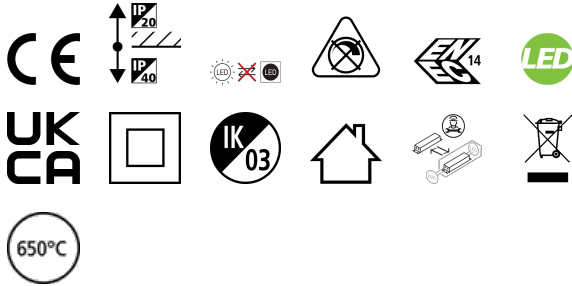

Edge lit LED flat panel with low glare (UGR<19). Low Flicker, 40 W, Neutral White, 4000 K, 4000 lumens, 100 lm/W, Average lifespan: 120.000Hrs, prismatic diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10 x 621 x 621 mm


Atouts techniques

Dimensions (mm)

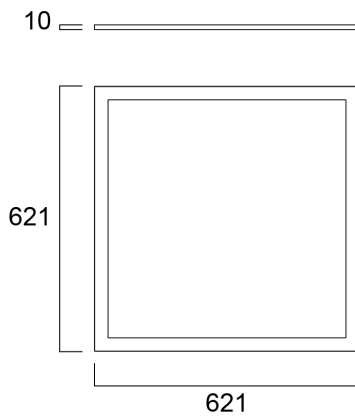

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.52 0.51	60° 60° 60°	0.52 0.51	0.52 0.51	0.52 0.51	7770 1559 1559
1.0	1.03 1.03	60° 60° 60°	1.03 1.03	1.03 1.03	1.03 1.03	1948 390 390
1.5	2.75 2.74	60° 60° 60°	2.75 2.74	2.75 2.74	2.75 2.74	884 173 173
2.0	3.67 3.65	60° 60° 60°	3.67 3.65	3.67 3.65	3.67 3.65	486 97 97
2.5	4.58 4.57	60° 60° 60°	4.58 4.57	4.58 4.57	4.58 4.57	311 62 62
3.0	5.50 5.48	60° 60° 60°	5.50 5.48	5.50 5.48	5.50 5.48	216 43 43

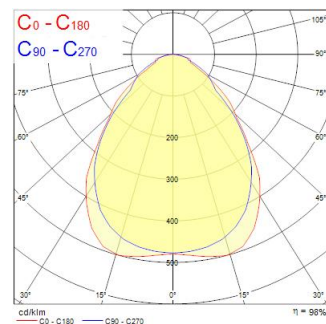

START Panel Flat UGR19 625x625 4000Lm 840

Code article 0047245

SYLVANIA

Données générales

Nom du produit	START Panel Flat UGR19 625x625 4000Lm 840
Technologie	LED
Housing	Aluminium
Montage	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
General application	Education, Office
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4,100
Luminaire efficacy (lm/W)	103
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	40
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15.0
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	980
Courant d'appel (A)	10
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	55
Max. products per 13A C Breaker	70
Max. products per 16A C Breaker	85
Max. products per 20A C Breaker	110

Durée de vie

Lifespan L70 B50	120000
------------------	--------

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Longueur (mm)	621
Largeur (mm)	621
Nominal Product Height (mm)	10
Poids (kg)	2.778
Recessed Depth (mm)	38

START Panel Flat UGR19 625x625 4000Lm 840

Code article 0047245

SYLVANIA

Emballage

Product EAN number	5410288472454
Longueur simple de l'emballage (cm)	65.5
Largeur simple de l'emballage (cm)	4.4
Packaging single depth (cm)	70.0
DUN14 (inner)	15410288472451
Units per outer package	2
Packaging outer length / height (cm)	67.5
Packaging outer width (cm)	10.8
Packaging outer depth (cm)	72.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40