

QUADRO UGR16 600x600 DALI 4600LM 840

Code article 0047252

SYLVANIA


PROTM



Unique stylish recessed modular Led luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75 degree beam angle , optical system: white painted reflector with total internal reflection lenses. Light color temperature: 4000K Neutral White, total system power: 36W , total fixture output: 4600lm, efficacy: 128 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 77,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, DALI dimmable driver, electrical protection: Class I. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 4,8Kg.

Atouts techniques


Dimensions (mm)

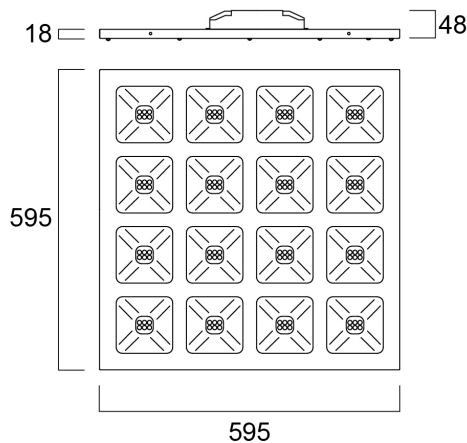

Photométrie

Distance [m]	Cone diameter [m]	E10° [lx]	E30° [lx]	E60° [lx]	E90° [lx]
0.5	0.74 0.75	1346	363*	352*	354*
1.0	1.45 1.48	3374	881*	861*	875*
1.5	2.22 2.24	1500	382*	368*	369*
2.0	2.96 2.98	844	223*	213*	219*
2.5	3.70 3.72	540	141*	134*	140*
3.0	4.44 4.47	375	93*	89*	91*

* Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 73.4°)
 — C90 - C270 (Half beam angle: 73.0°)



QUADRO UGR16 600x600 DALI 4600LM 840

Code article 0047252

SYLVANIA

Données générales

Nom du produit	QUADRO UGR16 600x600 DALI 4600LM 840
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting, Suspended
General application	Education, Office
Operating temperature range (°C)	-10°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4600
Luminaire efficacy (lm/W)	128
LOR (%)	100
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1
Maintien du flux à la fin de la durée de vie nominale (lm)	70

Caractéristiques électriques

Consommation électrique totale (W)	36
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9.0
Electrical protection	Class I
Control gear required	No
Type d'appareillage	Electronic ballast
No. Of switching cycles before premature failures	>100000
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	155
Courant d'appel (A)	40
Inrush Duration (µs)	150
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	38
Max. products per 13A C Breaker	48
Max. products per 16A C Breaker	60
Max. products per 20A C Breaker	75
Max. products per 10A B Breaker	32
Max. products per 13A B Breaker	41
Max. products per 16A B Breaker	52
Max. products per 20A B Breaker	64

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	77000

QUADRO UGR16 600x600 DALI 4600LM 840

Code article 0047252

SYLVANIA

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Diffuser material	None
Longueur (mm)	595
Largeur (mm)	595
Nominal Product Height (mm)	18.8
Poids (kg)	3.362
Recessed Depth (mm)	60

Emballage

Product EAN number	5410288472522
Longueur simple de l'emballage (cm)	60.5
Largeur simple de l'emballage (cm)	2.8
Packaging single depth (cm)	66.7
DUN14 (inner)	15410288472529
Units per outer package	1
Packaging outer length / height (cm)	60.5
Packaging outer width (cm)	2.8
Packaging outer depth (cm)	66.7

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-50