


START WATERPROOF LED 1565MM TWIN 6500K

Code article 0047879


SYLVANIA

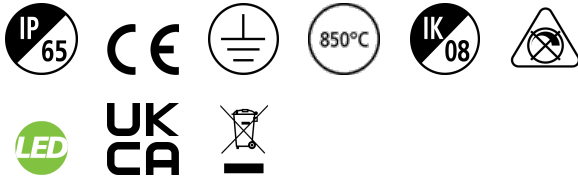

Weather resistant LED Luminaire, 1565MM with Twin Lamp, 80W at 6500K, 106lm/W. UV stabilised polycarbonate cover with specially designed opal lens - softens and control the light whilst optimising output. No yellow staining. Highly efficient electronic driver included as standard. Smooth body finish, easy to handle. Minimal maintenance with no replacement of lamps. Through wiring achievable. IP65 rating and IK08 body durable for harsh locations. Professionally finished with Stainless Steel brackets. Suspension compatible.

Atouts techniques

Dimensions (mm)

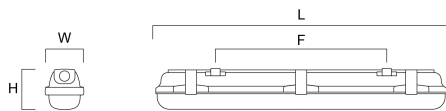


Version	L	W	H	F
Single	662	83	91	390
Twin	662	123	91	390
Single	1265	83	91	855
Twin	1265	123	91	855
Single	1565	83	91	955
Twin	1565	123	91	955

Photométrie

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.61	1038
	1.38	504
	1.13	1101
1.0	3.23	254
	2.76	201
	2.29	250
1.5	4.84	124
	4.13	98
	3.43	150
2.0	6.45	69
	5.51	55
	4.57	80
2.5	8.06	44
	6.88	35
	5.69	48
3.0	9.68	30
	8.26	24
	6.87	31

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 100.0°)
 — C90 - C270 (Half beam angle: 116.4°)



START WATERPROOF LED 1565MM TWIN 6500K

Code article 0047879

SYLVANIA

Données générales

Nom du produit	START WATERPROOF LED 1565MM TWIN 6500K
Technologie	LED
Housing	PC Polycarbonate
Montage	Ceiling surface mounting, Suspended
Fixture rating	Enclosed
Environment	Internal/External with protection
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+40°C
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	8500
Luminaire efficacy (lm/W)	106
LOR (%)	100
Température de couleur (K)	6500
Couleur de lumière	Daylight
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Chromaticité réglable	N
Beam Angle (°)	120
Distribution type	Direct
Glare control	< 26
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	80
Lamp power factor	0.9
Electrical protection	Class I
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	2000
Courant d'appel (A)	9
Inrush Duration (µs)	109
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	11
Max. products per 16A C Breaker	29
Max. products per 20A C Breaker	35
Max. products per 16A B Breaker	25
Max. products per 20A B Breaker	32

Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Longueur (mm)	1565
Largeur (mm)	123
Nominal Product Height (mm)	91
Poids (kg)	2.494

START WATERPROOF LED 1565MM TWIN 6500K

Code article 0047879

SYLVANIA

Emballage

Product EAN number	5410288478791
Longueur simple de l'emballage (cm)	156.6
Largeur simple de l'emballage (cm)	12.5
Packaging single depth (cm)	9.4
DUN14 (inner)	05410288478791
Units per outer package	1
Packaging outer length / height (cm)	156.6
Packaging outer width (cm)	12.5
Packaging outer depth (cm)	9.4

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-30-40