


# START WATERPROOF 1200 HOUSING 1X

Code article 0047922

**SYLVANIA**


**START**<sup>TM</sup>

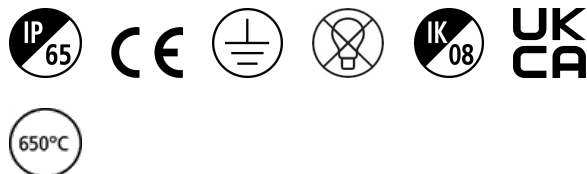

• Luminaire, polycarbonate housing • Single version, 1200mm • Protection type IP65 • Luminous flux and light colour vary depending on LED tubes used • To be used with T8 LED tubes • Easy to install with stainless steel fixing brackets included for ceiling mounting • Ideal for any industrial facilities, garages, car parks, workshops.

## Atouts techniques

### Dimensions (mm)

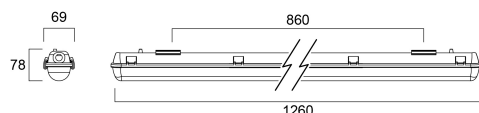

### Photométrie

### Données générales

Nom du produit	START WATERPROOF 1200 HOUSING 1X
Technologie	Light Source Not Integrated
Cap/Base	G13
Housing	PC Polycarbonate
Montage	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC002892
Warranty	3 ans

### Données optiques

LOR (%) | 75

### Caractéristiques électriques

Lampe incluse	Fixture without Lightsource
Electrical protection	Class I

# START WATERPROOF 1200 HOUSING 1X

Code article 0047922

**SYLVANIA**

## Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Longueur (mm)	1260
Largeur (mm)	69
Nominal Product Height (mm)	78
Poids (kg)	0.81

## Emballage

Product EAN number	5410288479224
Longueur simple de l'emballage (cm)	128.0
Largeur simple de l'emballage (cm)	6.9
Packaging single depth (cm)	5.2
DUN14 (inner)	15410288479221
Units per outer package	1
Packaging outer length / height (cm)	128.0
Packaging outer width (cm)	6.9
Packaging outer depth (cm)	5.2

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40