

START Panel UGR19 600x600 3000-4700lm 830/840 MP

Code article 0048091

SYLVANIA


START



START Panel is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. With the help of DIP Switch multiple lumen outputs can be set up in 4 steps and with the CCT switch the customer is enabled to switch between 3000K and 4000K colour temperatures (3000K: 21W 3000lm, 25W 3550lm, 29W 4000lm, 33W 4450lm; 4000K: 21W 3150lm, 25W 3750lm, 29W 4200lm, 33W 4700lm). Max. drive current: 850mA; Lifespan: 100.000Hrs L80:B50; CRI 80; Efficacy up to: 150Lm/W; Glare control <19; IK03; IP40 (from the front); Class II; Tp(b) rated diffuser that may not burn at a speed of more than 50mm per minute. Lumen output in Emergency mode: 540lm @4000K.

Atouts techniques


Dimensions (mm)

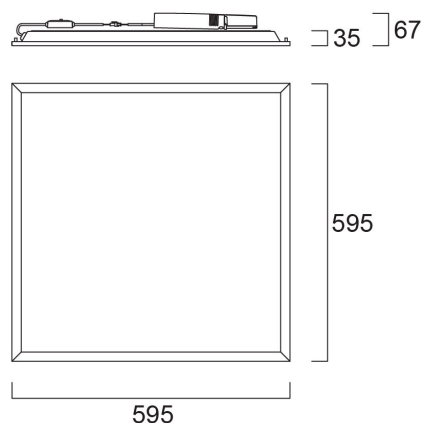

Photométrie

Distance (m)	Cone diameter (m)	Beam angle (°)	Beam diameter (m)	Beam diameter (ft)	Beam diameter (in)	Beam diameter (mm)
0.5	0.88	83.0°	0.88	3.50	35.0	880
1.0	1.76	83.0°	1.76	7.00	70.0	1760
1.5	2.64	83.0°	2.64	10.50	105.0	2640
2.0	3.52	83.0°	3.52	14.00	140.0	3520
2.5	4.40	83.0°	4.40	17.50	175.0	4400
3.0	5.28	83.0°	5.28	21.00	210.0	5280

Distance (m) Cone diameter (m)
C2 - C180 (Half beam angle: 83.0°)
C90 - C270 (Half beam angle: 83.0°)



START Panel UGR19 600x600 3000-4700lm 830/840 MP

Code article 0048091

SYLVANIA

Données générales

Nom du produit	START Panel UGR19 600x600 3000-4700lm 830/840 MP
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	5°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4289275
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4700
Luminaire efficacy (lm/W)	142
Couleur de lumière	Warm White or Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	33
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15.0
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	800
Courant d'appel (A)	31
Inrush Duration (µs)	19
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	37
Max. products per 13A C Breaker	48
Max. products per 16A C Breaker	61
Max. products per 20A C Breaker	75
Max. products per 10A B Breaker	23
Max. products per 13A B Breaker	29
Max. products per 16A B Breaker	36
Max. products per 20A B Breaker	45
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

START Panel UGR19 600x600 3000-4700lm 830/840 MP

Code article 0048091



Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	92000
Lifespan L90 B50	58000
Lifespan L90 B20	49000
Lifespan L90 B10	45000

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	PS Polystyrene
Longueur (mm)	595
Largeur (mm)	595
Nominal Product Height (mm)	35
Poids (kg)	2.0

Emballage

Product EAN number	5410288480916
Longueur simple de l'emballage (cm)	64.5
Largeur simple de l'emballage (cm)	3.5
Packaging single depth (cm)	60.0
DUN14 (inner)	15410288480913
Units per outer package	4
Packaging outer length / height (cm)	66.5
Packaging outer width (cm)	16.8
Packaging outer depth (cm)	62.8

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	5-25