


# Sylveo LED 30000LM RASYM 3K

Code article 0049129


**SYLVANIA**

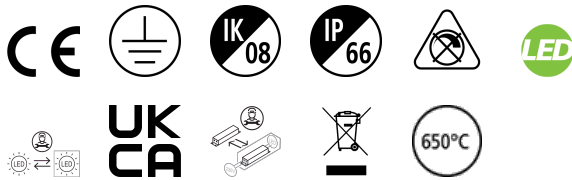


Exterior LED Floodlight, comes complete with a 1000mm cable and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 3000K, Non-dimming, 30935lm, 300W, 103lm/W, 8400mA, CRI70, 52°x117° beam angle, 50000hrs, (LxWxD) 98x648x392mm

## Atouts techniques

### Dimensions (mm)

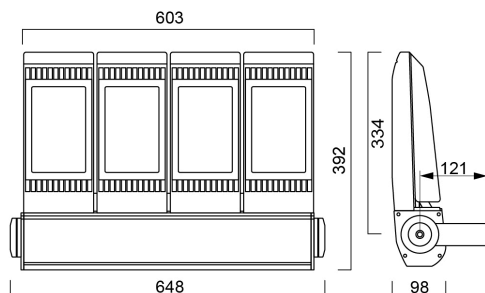

### Photométrie

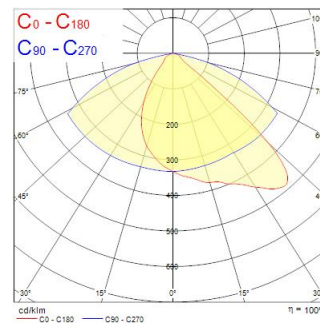

# Sylveo LED 30000LM RASYM 3K

Code article 0049129

**SYLVANIA**

## Données générales

Nom du produit	Sylveo LED 30000LM RASYM 3K
Technologie	LED
Housing	Aluminium
Montage	Wall surface mounted
Fixture rating	Enclosed
Environment	Internal/External
General application	Logistics & Industry
Operating temperature range (°C)	-40°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4579187
Numéro virtuel SE	7763378
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	30935
Luminaire efficacy (lm/W)	103
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	70
Colour Variation Initial (SDCM)	SDCM6
Chromaticité réglable	N
Beam Angle (°)	52 x 117
Glare control	< 18
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	300.4
Actuel (A)	1.304
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	8400
Courant d'appel (A)	60
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	2
Max. products per 13A C Breaker	2
Max. products per 16A C Breaker	3
Max. products per 20A C Breaker	4
Max. products per 10A B Breaker	1
Max. products per 13A B Breaker	1
Max. products per 16A B Breaker	2
Max. products per 20A B Breaker	2
Mains surge immunity (differential mode -> L-N) (kV)	4
Mains surge immunity (common mode -> L/N - GND) (kV)	6

## Durée de vie

Lifespan L70 B50	50000
Lifespan L80 B50	49000

# Sylveo LED 30000LM RASYM 3K

Code article 0049129

**SYLVANIA**

## Données physiques

Housing colour	RAL 9006 - Aluminium
IP rating	IP66
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	Glass
Longueur (mm)	648
Largeur (mm)	98
Nominal Product Height (mm)	392
Poids (kg)	15.844
Wind Area (m <sup>2</sup> )	0.236

## Emballage

Product EAN number	5410288491295
Longueur simple de l'emballage (cm)	52.7
Largeur simple de l'emballage (cm)	70.1
Packaging single depth (cm)	16.5
DUN14 (inner)	05410288491295
Units per outer package	1
Packaging outer length / height (cm)	52.7
Packaging outer width (cm)	70.1
Packaging outer depth (cm)	16.5

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-40-45