


RANA NEO 3700LM REC 1200x300 840 SSC EM 1L WHITE

Code article 0052599

SYLVANIA


PROTM

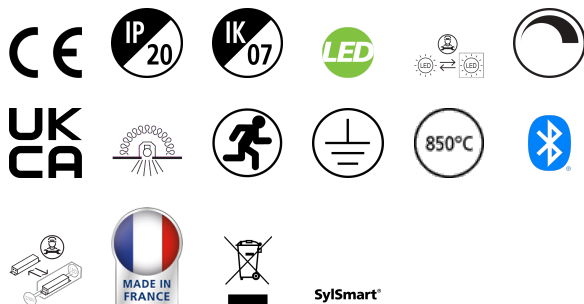

Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + MPO diffuser, Direct Light Distribution, Luminaire Dimensions: 1196x296x52mm, Sylvania White body colour, IP20, IK07, SylSmart Standalone capable, Emergency 3 hours, Low LED flicker (+/-5%), Neutral White (4000K), LED Colour Temperature, 3761lm, 33W, 113lm/W, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m², Lifespan: 96,000 hours L80B20, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.

Atouts techniques

Dimensions (mm)

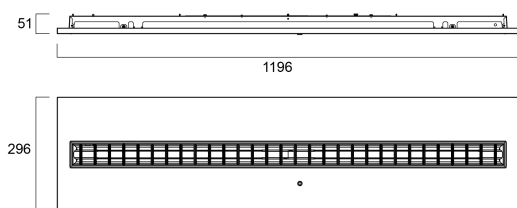


Photométrie

0.5	0.91 0.89	E17° E180° 42.4° E180° 34.8°	9570 1921 2573
1.0	1.83 1.35	E17° E180° 42.4° E180° 34.8°	2380 483 686
1.5	2.74 2.07	E17° E180° 42.4° E180° 34.8°	1083 249 351
2.0	3.65 2.76	E17° E180° 42.4° E180° 34.8°	596 131 187
2.5	4.57 3.45	E17° E180° 42.4° E180° 34.8°	383 77 107
3.0	5.48 4.14	E17° E180° 42.4° E180° 34.8°	266 54 74

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 69.3°)
— C90 - C270 (Half beam angle: 84.8°)



RANA NEO 3700LM REC 1200x300 840 SSC EM 1L WHITE

Code article 0052599

SYLVANIA

Données générales

Nom du produit	RANA NEO 3700LM REC 1200x300 840 SSC EM 1L WHITE
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	5°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3761
Luminaire efficacy (lm/W)	113
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80

Caractéristiques électriques

Emergency mode	Non-maintained
Emergency type	
Emergency duration (h)	3
Consommation électrique totale (W)	33
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Standalone (SSC)
Minimum dimming level (%)	1
Drive current (mA)	600
Courant d'appel (A)	20
Inrush Duration (µs)	25
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	57
Max. products per 13A C Breaker	71
Max. products per 16A C Breaker	93
Max. products per 20A C Breaker	114
Max. products per 10A B Breaker	35
Max. products per 13A B Breaker	45
Max. products per 16A B Breaker	55
Max. products per 20A B Breaker	68
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5

RANA NEO 3700LM REC 1200x300 840 SSC EM 1L WHITE

Code article 0052599

SYLVANIA

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	96000

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Longueur (mm)	1196
Largeur (mm)	296
Nominal Product Height (mm)	52
Poids (kg)	5.5

Emballage

Product EAN number	5410288525990
Longueur simple de l'emballage (cm)	124.5
Largeur simple de l'emballage (cm)	6.5
Packaging single depth (cm)	32.0
DUN14 (inner)	05410288525990
Units per outer package	1
Packaging outer length / height (cm)	124.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	32.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	5-25