

START Downlight 5IN1 50-125 1150LM DIM

Code article 0053071

SYLVANIA


STARTTM



START Downlight 5in1 is an integrated LED recessed / surface mounted downlight with built in dimmable driver. Colour temperature (3000K, 4000K and 6500K) can be adjusted by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 50mm to 125mm.

Atouts techniques


Dimensions (mm)

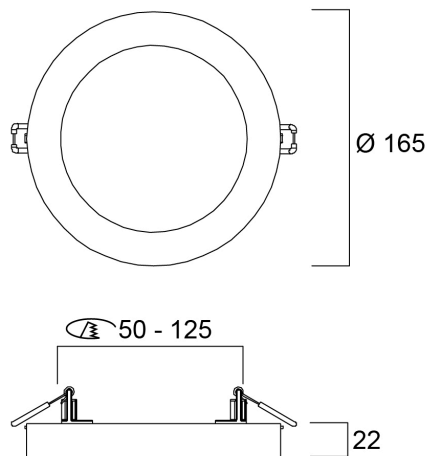

Photométrie

0.5	1.44	50°	50.3°	1881	154
1.0	2.89	50°	50.3°	415	36
1.5	4.33	50°	50.3°	188	17
2.0	5.78	50°	50.3°	104	10
2.5	7.22	50°	50.3°	66	6
3.0	8.67	50°	50.3°	46	4

Distance [m] Cone diameter [m]
C0 - C180 (half beam angle: 110.6°)



START Downlight 5IN1 50-125 1150LM DIM

Code article 0053071

SYLVANIA

Données générales

Nom du produit	START Downlight 5IN1 50-125 1150LM DIM
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality, Retail, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4279671
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	95
Couleur de lumière	Warm White or Neutral White or Daylight
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Distribution type	Symmetric
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	12
Actuel (A)	0.065
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.8
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	40.0
Electrical protection	Class II
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Minimum dimming level (%)	10
Drive current (mA)	128
Courant d'appel (A)	5
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	83
Max. products per 13A C Breaker	108
Max. products per 16A C Breaker	154
Max. products per 20A C Breaker	167
Max. products per 10A B Breaker	58
Max. products per 13A B Breaker	76
Max. products per 16A B Breaker	154
Max. products per 20A B Breaker	117
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

START Downlight 5IN1 50-125 1150LM DIM

Code article 0053071



Durée de vie

Lifespan L70 B50	55000
Lifespan L80 B50	36000
Lifespan L80 B10	30000

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PS Polystyrene
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	22
Nominal Product Diameter (mm)	165
Poids (kg)	0.269

Emballage

Product EAN number	5410288530710
Longueur simple de l'emballage (cm)	20.3
Largeur simple de l'emballage (cm)	19.2
Packaging single depth (cm)	4.8
DUN14 (inner)	15410288530717
Units per outer package	14
Packaging outer length / height (cm)	19.5
Packaging outer width (cm)	44.7
Packaging outer depth (cm)	37.5

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40