
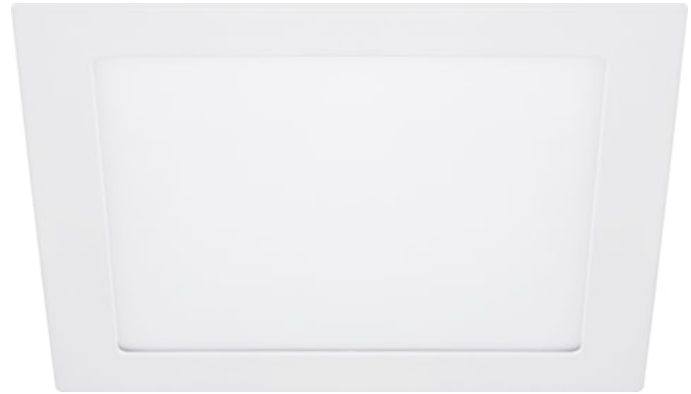


# START eco Downlight Flat 206 Square IP44 1650lm 830 DIM

Code article 0053939


**SYLVANIA**

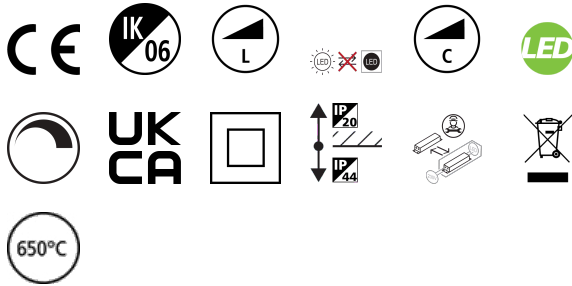

START eco Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1650Lm; 97Lm/W; 3000K; IP44 rated from the front; 30,000hrs (L70B50).

## Atouts techniques


### Dimensions (mm)

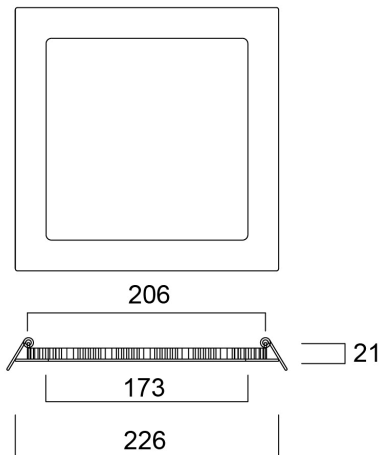

### Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	1.43	110°	2245	221
1.0	2.86	110°	596	55
1.5	4.28	110°	261	25
2.0	5.71	110°	147	14
2.5	7.14	110°	94	9
3.0	8.57	110°	66	6

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 110.0°)

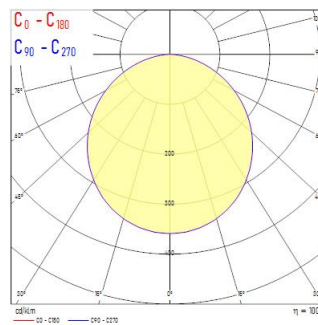

# START eco Downlight Flat 206 Square IP44 1650lm 830 DIM

Code article 0053939

**SYLVANIA**

## Données générales

Nom du produit	START eco Downlight Flat 206 Square IP44 1650lm 830 DIM
Technologie	LED
Housing	Aluminium
Montage	Ceiling recessed mounting
General application	Hospitality
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4278190
Warranty	3 ans

## Données optiques

Fixture luminous flux (lm)	1650
Luminaire efficacy (lm/W)	97
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

## Caractéristiques électriques

Consommation électrique totale (W)	17
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	450
Courant d'appel (A)	4.16
Inrush Duration (µs)	112
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	67
Max. products per 13A C Breaker	87
Max. products per 16A C Breaker	107
Max. products per 20A C Breaker	133
Max. products per 10A B Breaker	67
Max. products per 13A B Breaker	87
Max. products per 16A B Breaker	107
Max. products per 20A B Breaker	133

## Durée de vie

Lifespan L70 B50	60000
Lifespan L80 B50	50000
Lifespan L80 B10	42000
Lifespan L90 B50	28000
Lifespan L90 B10	23000

# START eco Downlight Flat 206 Square IP44 1650lm 830 DIM

Code article 0053939

**SYLVANIA**

## Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Diffuser finish	Opal
Diffuser material	PS Polystyrene
Longueur (mm)	226
Largeur (mm)	226
Nominal Product Height (mm)	21
Poids (kg)	0.557

## Emballage

Product EAN number	5410288539393
Longueur simple de l'emballage (cm)	29.0
Largeur simple de l'emballage (cm)	23.0
Packaging single depth (cm)	4.2
DUN14 (inner)	15410288539390
Units per outer package	10
Packaging outer length / height (cm)	47.5
Packaging outer width (cm)	23.0
Packaging outer depth (cm)	30.5

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40