


START Downlight Flat 155 IP44 850-1150lm 2CCT

Code article 0054148

SYLVANIA


START

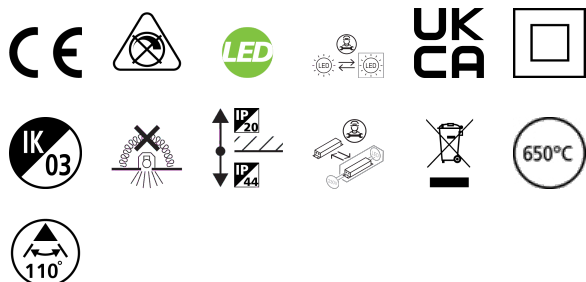

START Downlight Flat IP44 is an integrated LED recessed downlight with a high efficient non dimmable downlight luminaire with multipower driver (the luminous flux of the luminaire can be tailored to local needs by only setting a quick selector switch on the driver: 7.5W – 900lm, 10W – 1150lm for 4000K, 7.5W – 850lm, 10W – 1100lm for 3000K, Colour temperature 2CCT : 3000K Warm white, 4000K Neutral White, Class II, Protection rating IP44/IP20, Loop-in/Loop-out terminals for fast wiring, Cut out dimensions: 155-161mm

Atouts techniques

Dimensions (mm)

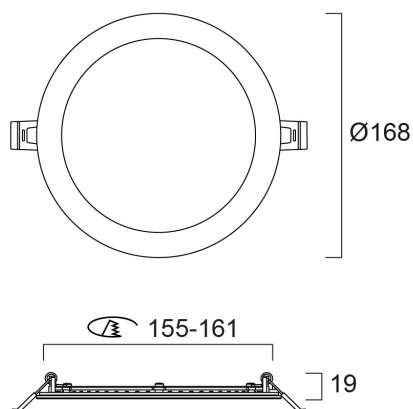

Photométrie

START Downlight Flat 155 IP44 850-1150lm 2CCT

Code article 0054148

SYLVANIA

Données générales

Nom du produit	START Downlight Flat 155 IP44 850-1150lm 2CCT
Technologie	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality, Retail
Operating temperature range (°C)	-10°C...+45°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4170720
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	115
Couleur de lumière	Warm White or Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 29
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	10
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Courant d'appel (A)	16.5
Inrush Duration (µs)	183
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	38
Max. products per 13A C Breaker	50
Max. products per 16A C Breaker	63
Max. products per 20A C Breaker	78
Max. products per 10A B Breaker	22
Max. products per 13A B Breaker	29
Max. products per 16A B Breaker	36
Max. products per 20A B Breaker	46
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

Durée de vie

Lifespan L70 B50	100000
------------------	--------

START Downlight Flat 155 IP44 850-1150lm 2CCT

Code article 0054148



Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PS Polystyrene
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	19
Nominal Product Diameter (mm)	168
Poids (kg)	0.298

Emballage

Product EAN number	5410288541488
Longueur simple de l'emballage (cm)	16.8
Largeur simple de l'emballage (cm)	16.8
Packaging single depth (cm)	1.9
DUN14 (inner)	15410288541485
Units per outer package	24
Packaging outer length / height (cm)	36.6
Packaging outer width (cm)	41.3
Packaging outer depth (cm)	28.6

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-45