


RANA NEO 8800LM S 1500 830 SSC EM 2L WHITE

Code article 0054268

SYLVANIA


PROTM

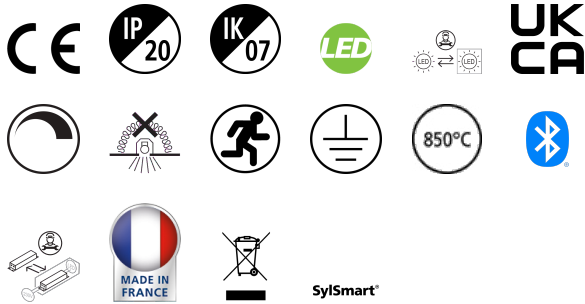

Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1447x187x56mm, White body colour, IP20, IK07, SylSmart Standalone capable, Emergency 3 hours, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 8800lm, 73W, 120lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

Atouts techniques

Dimensions (mm)

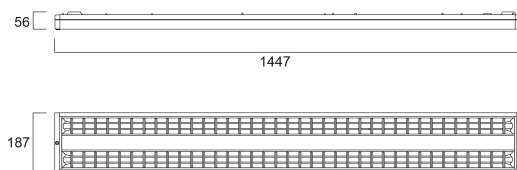

Photométrie

Distance [m]	Cone diameter [m]	E171	E180	E190	E200	E210	E220	E230	E240	E250	E260	E270	E280	E290	E300	E310	E320	E330	E340	E350	E360	E370	E380	E390	E400	E410	E420	E430	E440	E450	E460	E470	E480	E490	E500	E510	E520	E530	E540	E550	E560	E570	E580	E590	E600	E610	E620	E630	E640	E650	E660	E670	E680	E690	E700	E710	E720	E730	E740	E750	E760	E770	E780	E790	E800	E810	E820	E830	E840	E850	E860	E870	E880	E890	E900	E910	E920	E930	E940	E950	E960	E970	E980	E990	E1000																																																							
0.5	0.90 0.66	2095	4190	4900	5600	6300	7000	7700	8400	9100	9800	10500	11200	11900	12600	13300	14000	14700	15400	16100	16800	17500	18200	18900	19600	20300	21000	21700	22400	23100	23800	24500	25200	25900	26600	27300	28000	28700	29400	30100	30800	31500	32200	32900	33600	34300	35000	35700	36400	37100	37800	38500	39200	39900	40600	41300	42000	42700	43400	44100	44800	45500	46200	46900	47600	48300	49000	49700	50400	51100	51800	52500	53200	53900	54600	55300	56000	56700	57400	58100	58800	59500	60200	60900	61600	62300	63000	63700	64400	65100	65800	66500	67200	67900	68600	69300	70000	70700	71400	72100	72800	73500	74200	74900	75600	76300	77000	77700	78400	79100	79800	80500	81200	81900	82600	83300	84000	84700	85400	86100	86800	87500	88200	88900	89600	90300	91000	91700	92400	93100	93800	94500	95200	95900	96600	97300	98000	98700	99400	100000



RANA NEO 8800LM S 1500 830 SSC EM 2L WHITE

Code article 0054268

SYLVANIA

Données générales

Nom du produit	RANA NEO 8800LM S 1500 830 SSC EM 2L WHITE
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling surface mounting, Suspended
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	5°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	8800
Luminaire efficacy (lm/W)	121
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80

Caractéristiques électriques

Emergency mode	Non-maintained
Emergency type	
Emergency duration (h)	3
Consommation électrique totale (W)	80
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Standalone (SSC)
Minimum dimming level (%)	1
Drive current (mA)	300
Courant d'appel (A)	29
Inrush Duration (µs)	180
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5

RANA NEO 8800LM S 1500 830 SSC EM 2L WHITE

Code article 0054268

SYLVANIA

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	96000

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Longueur (mm)	1440
Largeur (mm)	187
Nominal Product Height (mm)	47
Poids (kg)	3.9

Emballage

Product EAN number	5410288542683
Longueur simple de l'emballage (cm)	153.5
Largeur simple de l'emballage (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (inner)	05410288542683
Units per outer package	1
Packaging outer length / height (cm)	153.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	5-25