


SYL-LAB LED IP65 RECESSED 36W 4K PAR 600 DALI

Code article 0055327


SYLVANIA

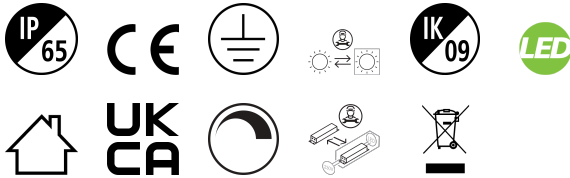

IP65 Panel DALI dimmable (Osram OTI DALI 50/220-240/1A4 LT2 FAN) , dual IP65 (above and below), recessed for t-grid ceiling, CRI80, tamper proof, steel construction, glass diffuser with matt louvres, 36W, 3900lm, 108lm/W, IK09, 4000K, 3 Step MacAdam Ellipse, driver current 250mA, Class 1, UGR<19, 220-240V, Average lifespan 90.000Hrs, HxWxD 595x595x80mm.


Atouts techniques

Dimensions (mm)

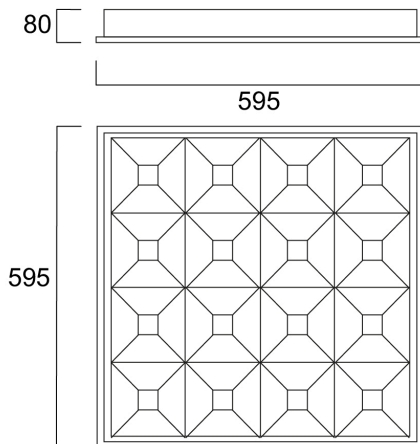

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.51	80°	6911
	1.48	85.4°	527
1.0	3.01	80°	1728
	2.97	85.4°	147
1.5	4.52	80°	789
	4.45	85.4°	98
2.0	6.02	80°	422
	5.93	85.4°	51
2.5	7.53	80°	276
	7.41	85.4°	34
3.0	9.03	80°	192
	8.90	85.4°	17

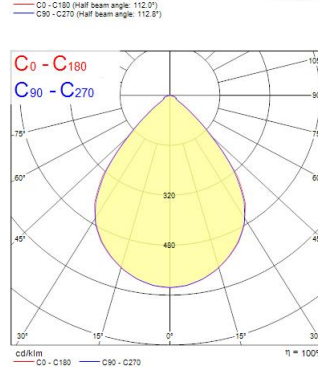

SYL-LAB LED IP65 RECESSED 36W 4K PAR 600 DALI

Code article 0055327

SYLVANIA

Données générales

Nom du produit	SYL-LAB LED IP65 RECESSED 36W 4K PAR 600 DALI
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting
General application	Logistics & Industry, Office
Operating temperature range (°C)	0°C...+30°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Numéro virtuel FI	4306939
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	108
Température ambiante pour un flux lumineux maximum (°C)	25
LOR (%)	100
Température de couleur (K)	4000
Colour Code	840
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	36
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class I
Control gear required	No
Dimmable	Yes
Dimming method	DALI, Switch-dim (mains-rated)
Minimum dimming level (%)	1
Drive current (mA)	250
Courant d'appel (A)	24
Inrush Duration (µs)	210
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	14
Max. products per 16A C Breaker	22

Durée de vie

Lifespan L80 B20	90000
------------------	-------

Données physiques

Housing colour	White
IP rating	IP65
IK rating	IK09
Diffuser finish	Transparent
Diffuser material	Glass
Longueur (mm)	595
Largeur (mm)	595
Nominal Product Height (mm)	80
Poids (kg)	6.5

SYL-LAB LED IP65 RECESSED 36W 4K PAR 600 DALI

Code article 0055327

SYLVANIA

Emballage

Product EAN number	5410288553276
Longueur simple de l'emballage (cm)	60.5
Largeur simple de l'emballage (cm)	60.5
Packaging single depth (cm)	8.0
DUN14 (inner)	05410288553276
Units per outer package	1
Packaging outer length / height (cm)	60.5
Packaging outer width (cm)	60.5
Packaging outer depth (cm)	8.0