


Pixo Medium 3650lm 930 NB MB WB SSA01D Black

Code article 0062398

SYLVANIA


PROTM

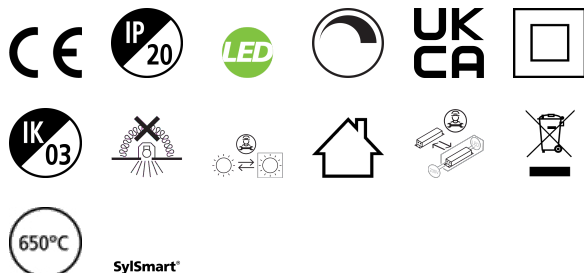


Combine Pixo with our wireless SylSmart controls for flexible, precise adjustment of each luminaire. Helping you highlight products, create focal points and enhance the overall customer experience. Easily update lighting as displays change using our intuitive mobile apps, ensuring your lighting keeps pace with your business. Increase energy efficiency by adding occupancy and daylight sensors for smart, automated savings. Simple and slick integral design with no driver box and without any visible screws. Improved thermal resistance with in-track driver, ideal for retail applications. Extremely precise light beams due to the high-quality lenses. Die-cast aluminum body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured black finishing colour. Light color temperature: 3000K, warm white System power: 32W, Fixture lumen output: 3650lm, efficacy: 114lm/W, Ra90 typical, LED chromaticity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation. Operating voltage 220-240V / 50-60Hz, SylSmart Connected enabled, dimmable wireless control via SylSmart Connected app, ultra low LED flickering rate, suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only. Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.81mmx150mm. 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal. Not compatible with surface mount monopoint accessory

Atouts techniques

Dimensions (mm)

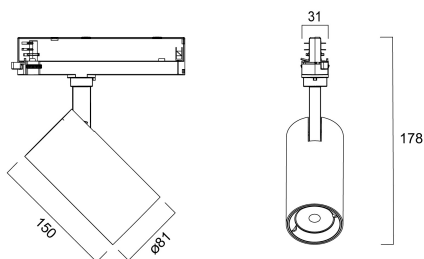


Photométrie



**Pixo Medium 3650lm 930 NB MB WB
SSA01D Black**

Code article 0062398

SYLVANIA



Données générales

Nom du produit	Pixo Medium 3650lm 930 NB MB WB SSA01D Black
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Built in presence detector	NONE
General application	Hospitality, Museums & Galleries, Retail
Operating temperature range (°C)	25°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3650
Luminaire efficacy (lm/W)	114
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Photobiological Risk Group	RG1

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	32
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Drive current (mA)	800
Courant d'appel (A)	36
Inrush Duration (µs)	7
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	76
Max. products per 16A B Breaker	76

Durée de vie

Lifespan L70 B50	100000
------------------	--------

Pixo Medium 3650lm 930 NB MB WB SSA01D Black

Code article 0062398



Données physiques

Housing colour	Black
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	High-gloss
Longueur (mm)	150
Nominal Product Diameter (mm)	81
Poids (kg)	0.858

Emballage

Product EAN number	5410288623986
Longueur simple de l'emballage (cm)	20.0
Largeur simple de l'emballage (cm)	25.0
Packaging single depth (cm)	20.0
DUN14 (inner)	05410288623986
Units per outer package	1
Packaging outer length / height (cm)	20.0
Packaging outer width (cm)	25.0
Packaging outer depth (cm)	20.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	25-25