


START Waterproof T 1500 HO IP65 8500lm 840

Code article 0068084


SYLVANIA

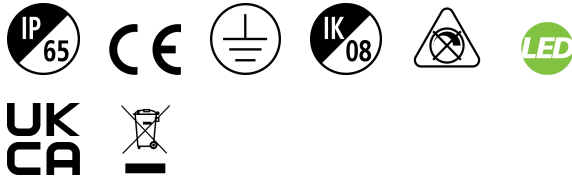

Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing, Polycarbonate diffuser, 8500 lm, 63 W, 135 lm/W, 4000 K, drive current 350 mA, Non dimmable, CRI80, IP65, IK08, Class I, nominal average life (h):50000, 1578 mm x 110 mm x 78 mm ,energy class: A++ A+ A, D-mark

Atouts techniques


Dimensions (mm)

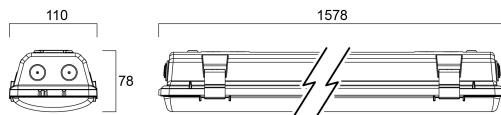

Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.15 1.54	0.07 0.09	1100 1000 904
1.0	2.29 3.08	0.14 0.18	270 250 225
1.5	3.44 4.62	0.21 0.27	124 117 100
2.0	4.58 6.16	0.28 0.36	69 66 58
2.5	5.73 7.70	0.35 0.45	44 44 38
3.0	6.88 9.24	0.42 0.54	31 31 25

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 114.0°)
 — C90 - C270 (Half beam angle: 97.8°)

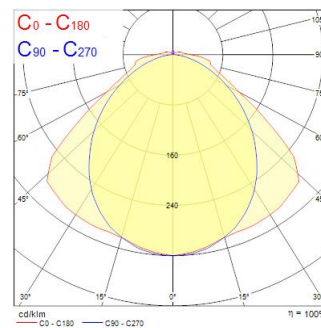

START Waterproof T 1500 HO IP65 8500lm 840

Code article 0068084

SYLVANIA

Données générales

Nom du produit	START Waterproof T 1500 HO IP65 8500lm 840
Technologie	LED
Housing	PC Polycarbonate
General application	Logistics & Industry
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
Numéro virtuel FI	4357000
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	8500
Luminaire efficacy (lm/W)	135
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	100
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	67
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Dimmable	No
Drive current (mA)	350
Courant d'appel (A)	15
Inrush Duration (µs)	50
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	32
Max. products per 16A C Breaker	39
Max. products per 20A C Breaker	48
Max. products per 10A B Breaker	24
Max. products per 13A B Breaker	32
Max. products per 16A B Breaker	39
Max. products per 20A B Breaker	48

Durée de vie

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000
Lifespan L80 B10	60000
Lifespan L90 B50	51000

START Waterproof T 1500 HO IP65 8500lm 840

Code article 0068084

SYLVANIA

Données physiques

IP rating	IP65
IK rating	IK08
Diffuser material	UV stabilized PC Polycarbonate
Longueur (mm)	1578
Largeur (mm)	110
Nominal Product Height (mm)	78
Poids (kg)	2.49

Emballage

Product EAN number	5410288680842
Longueur simple de l'emballage (cm)	167.2
Largeur simple de l'emballage (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (inner)	05410288680842
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4