

# START ECO FLEX IP20 RGB

Code article 0068125

**SYLVANIA**

**PRO**  
TM




**UK  
CA**



5 metre IP20 LED reel with pre-attached 3M adhesive type; 24V; RGB

## Atouts techniques


### Dimensions (mm)

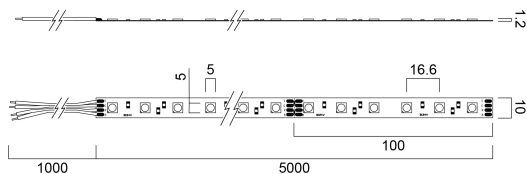

### Photométrie

| Distance [m] | Cone diameter [m] | Illuminance [lx] |
|--------------|-------------------|------------------|
| 0.5          | 1.47<br>2.16      | 507<br>308<br>11 |
| 1.0          | 2.94<br>4.33      | 127<br>77<br>4   |
| 1.5          | 4.41<br>6.49      | 55<br>33<br>2    |
| 2.0          | 5.88<br>8.66      | 31<br>18<br>1    |
| 2.5          | 7.36<br>10.82     | 16<br>9<br>0.5   |
| 3.0          | 8.83<br>12.99     | 10<br>5<br>0.3   |

Distance [m] Cone diameter [m] Illuminance [lx]  
— C0 - C180 (half beam angle: 130.4°)  
— C90 - C270 (half beam angle: 111.6°)



# START ECO FLEX IP20 RGB

Code article 0068125

**SYLVANIA**

## Données générales

|                     |                         |
|---------------------|-------------------------|
| Nom du produit      | START ECO FLEX IP20 RGB |
| Technologie         | LED                     |
| Type d'accessoire   | Mounting                |
| Montage             | Other                   |
| General application | Hospitality, Retail     |
| ETIM Class          | EC002706                |
| Numéro virtuel FI   | 4276911                 |
| Warranty            | 3 ans                   |

## Données optiques

|                                       |      |
|---------------------------------------|------|
| Useful luminous flux ( $\Phi_{use}$ ) | 1900 |
| Fixture luminous flux (lm)            | 1900 |
| IRC (Ra)                              | 30   |
| Beam Angle (°)                        | 120  |
| Photobiological Risk Group            | RG1  |

## Caractéristiques électriques

|                       |           |
|-----------------------|-----------|
| Power consumption (W) | 60        |
| Electrical protection | Class III |
| Control gear required | Yes       |
| Dimmable              | Yes       |
| Dimming method        | Other     |
| Drive current (mA)    | 2500      |

## Durée de vie

|                  |       |
|------------------|-------|
| Lifespan L70 B50 | 30000 |
| Lifespan L70 B10 | 30000 |
| Lifespan L80 B10 | 30000 |
| Lifespan L90 B10 | 30000 |

## Données physiques

|                             |      |
|-----------------------------|------|
| IP rating                   | IP20 |
| IK rating                   | IK00 |
| Longueur (mm)               | 5000 |
| Largeur (mm)                | 10   |
| Nominal Product Height (mm) | 2    |
| Poids (kg)                  | 0.15 |

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5410288681252  |
| Longueur simple de l'emballage (cm)  | 23.5           |
| Largeur simple de l'emballage (cm)   | 22.5           |
| Packaging single depth (cm)          | 3.0            |
| DUN14 (inner)                        | 15410288681259 |
| Units per outer package              | 20             |
| Packaging outer length / height (cm) | 49.0           |
| Packaging outer width (cm)           | 34.0           |
| Packaging outer depth (cm)           | 24.0           |

## Sécurité

|                     |     |
|---------------------|-----|
| Glow Wire Test (°C) | 650 |
|---------------------|-----|