
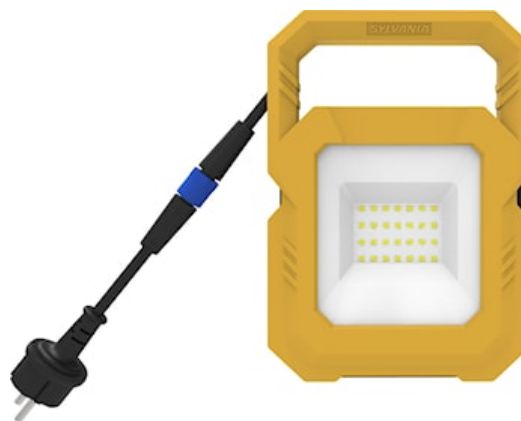


SylWork Flood 2000LM 840 IP65

Code article 0090004

SYLVANIA


YourHome™

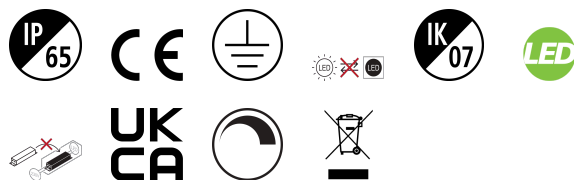

• Slim LED portable work light • Lightweight, slim, stylish robust, high-quality plastic body • Stable, flexible positioning with stand or Tripod • Housing material: PC housing, glass lens and metal bracket • Option to use 2 work lights in the same time installed on the same Tripod • Mains operated version • Space-saving design – Tripod version can be folded up and stowed away • 4000K Cool White light • Total system efficacy up to 100lm/W • CRI >80 • Operating temperature range: -20 to +40°C • Lifetime: 30.000 hrs (L70/B50) • 3 year warranty

Atouts techniques

Dimensions (mm)

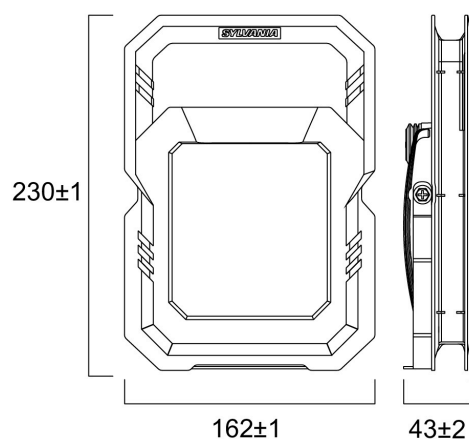

Photométrie

SylWork Flood 2000LM 840 IP65

Code article 0090004

SYLVANIA

Données générales

Nom du produit	SylWork Flood 2000LM 840 IP65
Technologie	LED
Cap/Base	N/A
Housing	Metal/plastic
General application	Residential & Consumer
ETIM Class	EC000346
Numéro virtuel FI	4357146
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	2000
Température de couleur (K)	4000
Couleur de lumière	Cool White
IRC (Ra)	80
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	20
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Electrical protection	Class I
Dimmable	Yes
Dimming method	Onboard pot
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50Hz
Connectable conductor cross section - Max (mm²)	1.0

Durée de vie

Lifespan L70 B50	30000
Lifespan L90 B10	10000

Données physiques

IP rating	IP65
IK rating	IK07
Longueur (mm)	230
Largeur (mm)	163
Nominal Product Height (mm)	43
Poids (kg)	0.95

Emballage

Product EAN number	5410288900049
Longueur simple de l'emballage (cm)	18.8
Largeur simple de l'emballage (cm)	6.2
Packaging single depth (cm)	25.5
DUN14 (inner)	15410288900046
Units per outer package	8
Packaging outer length / height (cm)	39.0
Packaging outer width (cm)	26.5
Packaging outer depth (cm)	27.5