


SylSpot Neos 400lm 830 IP44 3-PACK

Code article 0090084

SYLVANIA


Your**Home**TM

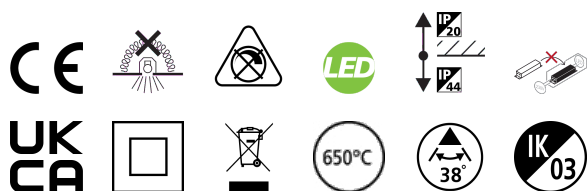

Integrated LED accent spotlight with ultra-low profile of 30mm (35mm for IP65 version which comes with fast terminals) IP44 SylSpot is ideal for kitchens and living rooms with 30° tilt and 360° rotation which allows you to place light exactly where you want to The unique lens gives the product the highly desirable "halogen sparkle Products available in elegant white finish Cut-out of 68mm allows direct replacement of most halogen spots installed in the market Good colour rendering index, CRI>80 Lifetime: 15,000 hours at L70

Atouts techniques

Dimensions (mm)

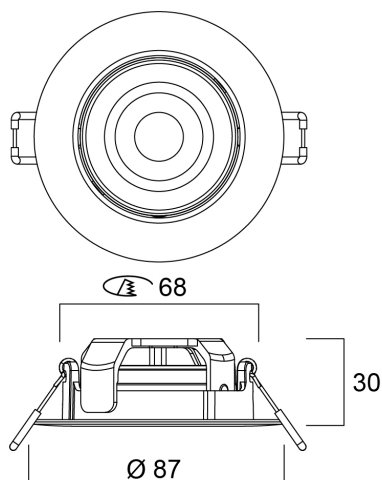

Photométrie

SylSpot Neos 400lm 830 IP44 3-PACK

Code article 0090084

SYLVANIA

Données générales

Nom du produit	SylSpot Neos 400lm 830 IP44 3-PACK
Technologie	LED
Cap/Base	N/A
Housing	Polymer
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Residential & Consumer
Operating temperature range (°C)	-10°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	400
Luminaire efficacy (lm/W)	89
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	38
Distribution type	Symmetric
Photobiological Risk Group	RG1

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	4.8
Actuel (A)	0.02
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.5
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	150
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Courant d'appel (A)	15
Inrush Duration (µs)	400
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	91
Max. products per 16A C Breaker	147
Max. products per 16A B Breaker	87
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

Durée de vie

Lifespan L70 B50	15000
Lifespan L80 B10	10000

SylSpot Neos 400lm 830 IP44 3-PACK

Code article 0090084



Données physiques

Housing colour	White
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	30
Nominal Product Diameter (mm)	87
Poids (kg)	0.129

Emballage

Product EAN number	5410288900841
Longueur simple de l'emballage (cm)	29.2
Largeur simple de l'emballage (cm)	4.9
Packaging single depth (cm)	9.9
DUN14 (inner)	15410288900848
DUN14 (outer)	25410288900845
Units per outer package	16
Packaging outer length / height (cm)	41.3
Packaging outer width (cm)	30.6
Packaging outer depth (cm)	22.4

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-40