


SYLSPOT KIT PLATINUM 360LM 840 IP20 BLACK 3-PACK

Code article 0090106

SYLVANIA

YourHome™

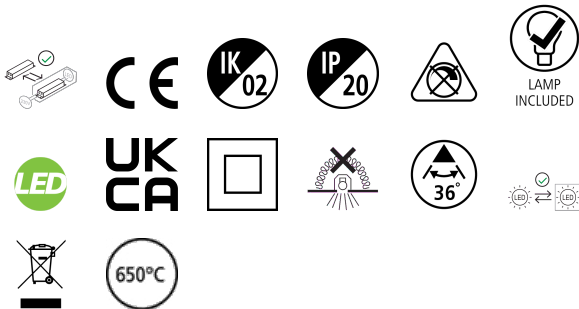

Energy efficient recessed spotlight Kit with A rated GU10 LED spotlight lamp. Polycarbonate body, round bezel ring in black colour finish, vertical tilt 30°, IP20 degree of protection, class II. Lumen output 360lm, CCT 4000K, Non Dim, beam angle 36°, CRI 80, power 2W, efficacy 211 lm/W, lifetime 30.000h. Ø90x103mm, cut-out Ø68-75mm. Suitable for internal environment only and for LED lamps only. Pack of 3 piece

Atouts techniques

Photométrie

Données générales

Nom du produit	SYLSPOT KIT PLATINUM 360LM 840 IP20 BLACK 3-PACK
Technologie	LED
Cap/Base	GU10
Housing	PC Polycarbonate
Montage	Ceiling recessed mounting
Built in presence detector	NONE
Environment	Indoor
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	360
Luminaire efficacy (lm/W)	189
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Luminous Intensity (cd)	750
Beam Angle (°)	36
Distribution type	None
Photobiological Risk Group	RG1

SYLSPOT KIT PLATINUM 360LM 840 IP20 BLACK 3-PACK

Code article 0090106

SYLVANIA

Caractéristiques électriques

Lampe incluse	0090112
Emergency type	
Consommation électrique totale (W)	2
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.4
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	168
Electrical protection	Class II
Type d'appareillage	Not required
Dimmable	No
Dimming method	N/A
Courant d'appel (A)	4.9
Inrush Duration (µs)	108
Energy Efficiency Class (A->G) of contained light source	A
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	195
Max. products per 16A B Breaker	153
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1

Données physiques

Housing colour	Black
IP rating	IP20
IK rating	IK02
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	Not Applicable
Longueur (mm)	103
Nominal Product Diameter (mm)	90
Built-in diameter (mm)	75
Poids (kg)	0.35

Emballage

Product EAN number	5410288901060
Longueur simple de l'emballage (cm)	30.05
Largeur simple de l'emballage (cm)	9.0
Packaging single depth (cm)	7.5
DUN14 (inner)	15410288901067
Units per outer package	16
Packaging outer length / height (cm)	38.0
Packaging outer width (cm)	32.0
Packaging outer depth (cm)	32.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40