


YOURHOME SYLWALL LUMINA PIR

Code article 0090192

SYLVANIA

YourHome™

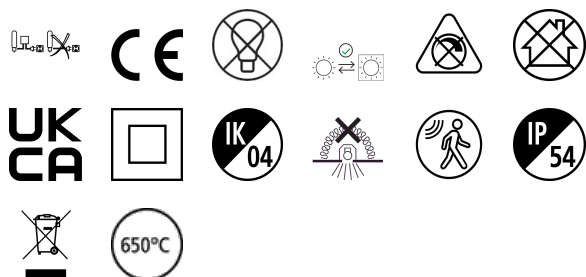

Light up your outdoor spaces with our sleek and durable black-finished wall light, perfect for porches, garages, sheds, and garden gates. Featuring an IP54-rated aluminium body with a glass diffuser, it withstands water, dust, and extreme temperatures while offering a long 30,000-hour lifetime. Compatible with E27 and SylSmart colour-changing lamps (not included), this stylish and energy-efficient light comes with a 3-year warranty for peace of mind

Atouts techniques

Photométrie

Données générales

| | |
|---|-----------------------------|
| Nom du produit | YOURHOME SYLWALL LUMINA PIR |
| Technologie | Light Source Not Integrated |
| Cap/Base | E27 |
| Housing | Metal/plastic |
| Montage | Wall surface mounted |
| Built in presence detector | PIR |
| General application | Residential & Consumer |
| Operating temperature range (°C) | -20°C...+40°C |
| Performance ambient temperature Tq (°C) | 25 |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC002892 |
| Warranty | 3 ans |

Données optiques

| | |
|---------------------------------|----------------|
| Fixture luminous flux (lm) | 1 |
| Luminaire efficacy (lm/W) | 1 |
| Couleur de lumière | N/A |
| Colour Variation Initial (SDCM) | N/A |
| Distribution type | None |
| Photobiological Risk Group | Not applicable |

YOURHOME SYLWALL LUMINA PIR

Code article 0090192

SYLVANIA

Caractéristiques électriques

| | |
|---|-----------------------------|
| Lampe incluse | Fixture without Lightsource |
| Emergency type | |
| Consommation électrique totale (W) | 1 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x % | 1 |
| Electrical protection | Class II |
| Control gear required | Yes |
| Type d'appareillage | Not required |
| Dimmable | No |
| Dimming method | N/A |
| Nominal Frequency (Hz) | N/A |
| Max. products per 10A C Breaker | 1 |
| Max. products per 16A C Breaker | 1 |
| Max. products per 16A B Breaker | 1 |
| Connectable conductor cross section - Min (mm ²) | 0.75 |
| Connectable conductor cross section - Max (mm ²) | 1.5 |

Données physiques

| | |
|-----------------------------|----------------------|
| Housing colour | RAL 9005 - Jet black |
| IP rating | IP54 |
| IK rating | IK04 |
| Diffuser finish | Other |
| Diffuser material | None |
| Longueur (mm) | 130 |
| Largeur (mm) | 120 |
| Nominal Product Height (mm) | 250 |
| Poids (kg) | 1.06 |

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5410288901923 |
| Longueur simple de l'emballage (cm) | 26.0 |
| Largeur simple de l'emballage (cm) | 14.0 |
| Packaging single depth (cm) | 12.5 |
| DUN14 (inner) | 15410288901920 |
| Units per outer package | 6 |
| Packaging outer length / height (cm) | 28.0 |
| Packaging outer width (cm) | 39.5 |
| Packaging outer depth (cm) | 30.0 |

Sécurité

| | |
|---|--------|
| Glow Wire Test (°C) | 650 |
| Condition de fonctionnement optimal (° C) | -20-40 |