


SYLSPLASH IP65 L1500 6250LM TriTone

Code article 0090232

SYLVANIA

YourHome™

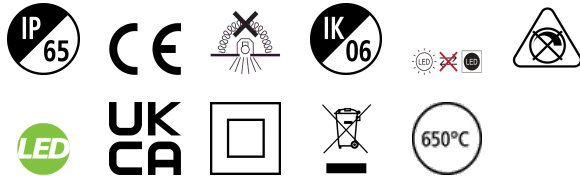

SylSplash is a slim water resistant LED integrated polycarbonate housing luminaire. With easy to access electrical terminal through bayonet lock end caps and tool-free electrical connection due to push-in terminal. Flexible installation as mounting brackets can be positioned freely on the luminaire. Colour selectable Warm White, Cool White or Daylight (3000K,4000K,6500K) controlled by wall switch. 50W; 6250lm; Efficiency with 125lm/W and 30,000 lifetime. SDCM ≤6; IP65; IK06; Class II; 1564mm x 53mm x 35mm

Atouts techniques

Photométrie

Données générales

Nom du produit	SYLSPLASH IP65 L1500 6250LM TriTone
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling surface mounting
Built in presence detector	NONE
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	6250
Luminaire efficacy (lm/W)	125
Couleur de lumière	Warm White or Neutral White or Daylight
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	125
Distribution type	Symmetric
Photobiological Risk Group	RG1

SYLSPLASH IP65 L1500 6250LM TriTone

Code article 0090232

SYLVANIA

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	50
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	30
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Courant d'appel (A)	30
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	13
Max. products per 16A C Breaker	21
Max. products per 16A B Breaker	17
Connectable conductor cross section - Min (mm²)	1.0
Connectable conductor cross section - Max (mm²)	1.5

Durée de vie

Lifespan L70 B50 | 30000

Données physiques

Housing colour	White
IP rating	IP65
IK rating	IK06
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Longueur (mm)	1564
Largeur (mm)	53
Nominal Product Height (mm)	35
Poids (kg)	0.46

Emballage

Product EAN number	5410288902326
Longueur simple de l'emballage (cm)	151.0
Largeur simple de l'emballage (cm)	5.3
Packaging single depth (cm)	3.5
DUN14 (inner)	15410288902323
Units per outer package	20
Packaging outer length / height (cm)	159.6
Packaging outer width (cm)	24.9
Packaging outer depth (cm)	22.5

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40