


SYLSPOT PIR 600/1050LM 3-CCT IP65 WH BEZEL

Code article 0090264

SYLVANIA


YourHome™

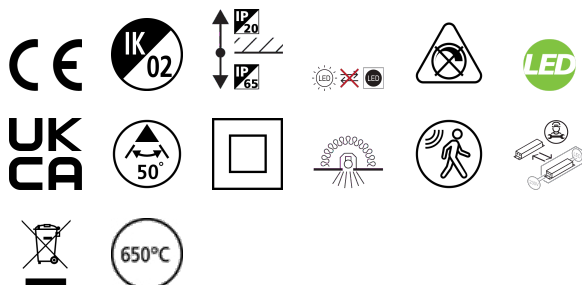

SylSpot IP65 PIR 600-1050LM 3CCT White is a universal spotlight offering PIR sensor setting options and three adjustable colour temperature options (3 CCT 2700K-3000K-4000K) for easy customisation to suit the need of the user. White finish, 2 wattage switch on the driver (6W-10W) as standard with 670lm & 1050lm for 4000K , 50° degree beam angle, low profile 31.7mm recessed depth, IP65 from the front, IK02, loop-in/loop-out terminals for fast wiring, 86mm Non-PIR bezel diameter, 68mm cutout. Additional white or black non PIR bezel can be ordered as accessory.


Atouts techniques

Dimensions (mm)

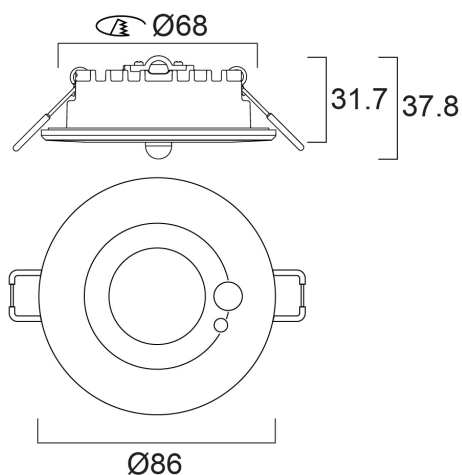

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.46 0.50	50° 52°	4200 1600
1.0	0.92 0.99	50° 52°	1050 400
1.5	1.37 1.49	50° 52°	470 160
2.0	1.83 1.99	50° 52°	280 100
2.5	2.29 2.48	50° 52°	170 60
3.0	2.75 2.96	50° 52°	130 45



SYLSPOT PIR 600/1050LM 3-CCT IP65 WH BEZEL

Code article 0090264

SYLVANIA

Données générales

Nom du produit	SYLSPOT PIR 600/1050LM 3-CCT IP65 WH BEZEL
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting
Built in presence detector	PIR
General application	Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+35°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	110
Couleur de lumière	Warm White or Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	50
Distribution type	Symmetric
Photobiological Risk Group	RG1

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	10
Actuel (A)	0.043
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.85
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	50
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	430
Courant d'appel (A)	2
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	80
Max. products per 13A C Breaker	104
Max. products per 16A C Breaker	128
Max. products per 20A C Breaker	160
Max. products per 10A B Breaker	49
Max. products per 13A B Breaker	64
Max. products per 16A B Breaker	79
Max. products per 20A B Breaker	99
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

SYLSPOT PIR 600/1050LM 3-CCT IP65 WH BEZEL

Code article 0090264



Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP65/20
IK rating	IK02
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	32
Nominal Product Diameter (mm)	86
Poids (kg)	0.236

Emballage

Product EAN number	5410288902647
Longueur simple de l'emballage (cm)	9.0
Largeur simple de l'emballage (cm)	7.8
Packaging single depth (cm)	13.5
DUN14 (inner)	15410288902644
Units per inner package	10
Packaging inner length / height (cm)	410.0
Packaging inner width (cm)	195.0
Packaging inner depth (cm)	180.0
Units per outer package	60
Packaging outer length / height (cm)	590.0
Packaging outer width (cm)	420.0
Packaging outer depth (cm)	380.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-35