


# Raxa Wallwasher 1200 CRI90 4000K DALI White

Code article 2016470

Concord

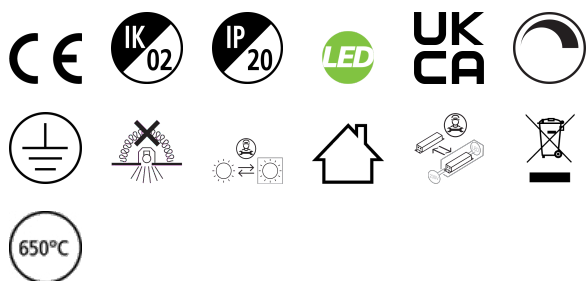


Raxa presents a refined solution for lighting needs, combining aesthetic finesse with functional excellence Raxa is a modular linear track system, easy and fast to install on 3-circuit tracks Specific track Adaptor that guarantees a safe electrical connection Aluminum body with a slim profile, 32mm only, neat and seamless installation on OneTrack Wallwasher diffuser, asymmetric light beam angle: 48° x 83° Textured white finishing colour. Light color temperature: 4000K, neutral white, Total system power: 29W, Fixture lumen output: 2900lm, efficacy: 100lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation, low flicker, DALI dimmable driver Suitable for installation on 3-circuit tracks, please check compatibility list. COMPATIBLE WITH OneTrack, Lytespan Round, Lytespan H-Track. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Nominal product dimensions: L.1146mmx32mmx75mm

## Atouts techniques

### Dimensions (mm)



### Photométrie



# Raxa Wallwasher 1200 CRI90 4000K DALI White

Code article 2016470

Concord

## Données générales

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Nom du produit                   | Raxa Wallwasher 1200 CRI90 4000K DALI White |
| Technologie                      | LED                                         |
| Cap/Base                         | N/A                                         |
| Housing                          | Aluminium                                   |
| Montage                          | Track mounting                              |
| Built in presence detector       | NONE                                        |
| General application              | Museums & Galleries, Office, Retail         |
| Operating temperature range (°C) | 1°C...+25°C                                 |
| Virtual assistant compatibility  | N/A                                         |
| ETIM Class                       | EC001744                                    |
| Warranty                         | 5 ans                                       |

## Données optiques

|                                 |               |
|---------------------------------|---------------|
| Fixture luminous flux (lm)      | 2900          |
| Luminaire efficacy (lm/W)       | 100           |
| Température de couleur (K)      | 4000          |
| Couleur de lumière              | Neutral White |
| IRC (Ra)                        | 90            |
| Colour Variation Initial (SDCM) | SDCM3         |
| Beam Angle (°)                  | 48x83         |
| Distribution type               | Asymmetric    |
| Glare control                   | < 24          |
| Photobiological Risk Group      | RG0           |

## Caractéristiques électriques

|                                                                  |                             |
|------------------------------------------------------------------|-----------------------------|
| Consommation électrique totale (W)                               | 29                          |
| Actuel (A)                                                       | 0.60                        |
| Primary Supply/Product voltage - min (V)                         | 220.0                       |
| Primary Supply/Product voltage - max (V)                         | 240.0                       |
| Lamp power factor                                                | 0.96                        |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x % | 10                          |
| Electrical protection                                            | Class I                     |
| Type d'appareillage                                              | LED driver constant current |
| Dimmable                                                         | Yes                         |
| Dimming method                                                   | DALI                        |
| Drive current (mA)                                               | 600                         |
| Courant d'appel (A)                                              | 5                           |
| Inrush Duration (µs)                                             | 50                          |
| Energy Efficiency Class (A->G) of contained light source         | F                           |
| Nominal Frequency (Hz)                                           | 50/60Hz                     |
| Max. products per 10A C Breaker                                  | 52                          |
| Max. products per 16A C Breaker                                  | 85                          |
| Max. products per 16A B Breaker                                  | 50                          |

## Durée de vie

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 102000 |
| Lifespan L80 B50 | 102000 |
| Lifespan L90 B50 | 53000  |
| Lifespan L90 B10 | 50000  |

# Raxa Wallwasher 1200 CRI90 4000K DALI White

Code article 2016470

Concord

## Données physiques

|                             |                  |
|-----------------------------|------------------|
| Housing colour              | White            |
| IP rating                   | IP20             |
| IK rating                   | IK02             |
| Diffuser finish             | Frosted          |
| Diffuser material           | PC Polycarbonate |
| Finition réflecteur         | Matt             |
| Longueur (mm)               | 1146             |
| Largeur (mm)                | 32               |
| Nominal Product Height (mm) | 75               |
| Poids (kg)                  | 1.355            |

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5025768164707  |
| Longueur simple de l'emballage (cm)  | 4.5            |
| Largeur simple de l'emballage (cm)   | 10.5           |
| Packaging single depth (cm)          | 118.5          |
| DUN14 (inner)                        | 05025768164707 |
| Units per outer package              | 1              |
| Packaging outer length / height (cm) | 4.5            |
| Packaging outer width (cm)           | 10.5           |
| Packaging outer depth (cm)           | 118.5          |

## Sécurité

|                                           |      |
|-------------------------------------------|------|
| Glow Wire Test (°C)                       | 650  |
| Condition de fonctionnement optimal (° C) | 1-25 |