
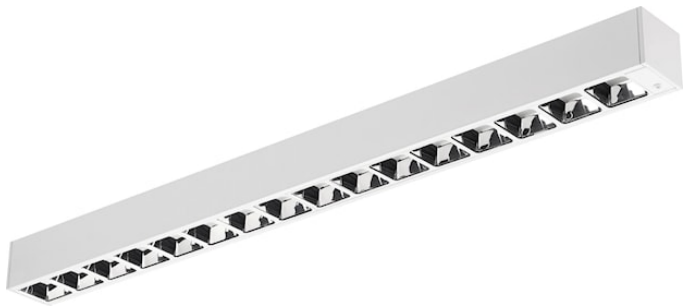


OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI EM

Code article 2023807


Concord

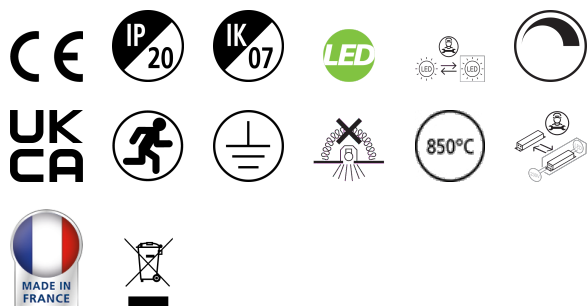

OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI EM is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Surface and suspended mounting. Size: 1160x90x80mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. DALI dimmable. 3hr maintained emergency version. 4000K Neutral White LED, CRI>90, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3100lm. Power consumption 30W. Luminaire efficacy 103lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m², IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.


Atouts techniques

Dimensions (mm)

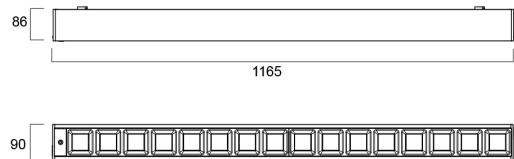

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Half beam angle [°]	Luminance [cd/m²]
0.5	0.78 0.75	50.1° 48.1°	25.0° 24.0°	3540 3280
1.0	1.57 1.50	50.1° 48.1°	25.0° 24.0°	885 820
1.5	2.35 2.24	50.1° 48.1°	25.0° 24.0°	388 368
2.0	3.14 3.03	50.1° 48.1°	25.0° 24.0°	189 184
2.5	3.92 3.81	50.1° 48.1°	25.0° 24.0°	126 122
3.0	4.70 4.59	50.1° 48.1°	25.0° 24.0°	107 103



OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI EM

Code article 2023807

Concord

Données générales

Nom du produit	OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI EM
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling surface mounting
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Office, Education, Retail
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	103
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	85

Caractéristiques électriques

Emergency mode	Non-maintained
Emergency type	
Emergency duration (h)	3
Consommation électrique totale (W)	30
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.98
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Standalone (SSC)
Minimum dimming level (%)	1
Drive current (mA)	275
Courant d'appel (A)	22.4
Inrush Duration (µs)	176
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI EM

Code article 2023807

Concord

Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Finition réflecteur	High-gloss
Longueur (mm)	1160
Largeur (mm)	90
Nominal Product Height (mm)	80
Poids (kg)	4.0

Emballage

Product EAN number	5025768238071
Longueur simple de l'emballage (cm)	119.0
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	11.0
DUN14 (inner)	05025768238071
Units per outer package	1
Packaging outer length / height (cm)	119.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	11.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	10-25