
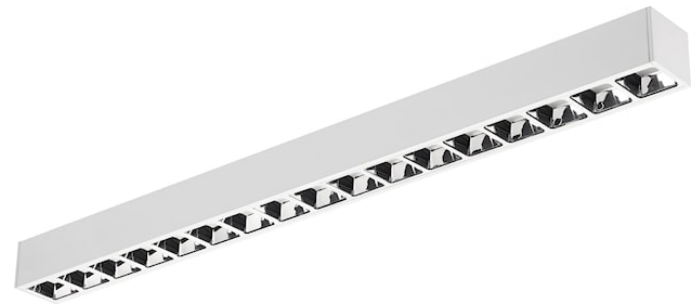


OPTIX LINEAR SURFACE 1200 D/I 3000K ALU

Code article 2023808


Concord

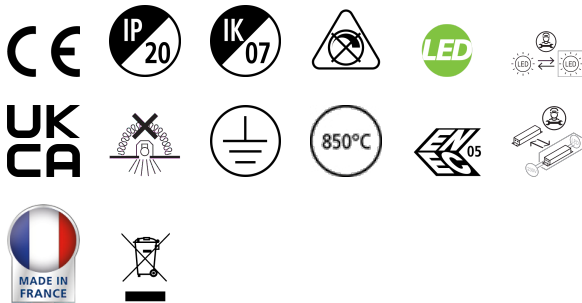



OPTIX LINEAR SURFACE 1200 D/I 3000K ALU is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Direct / Indirect lighting with 80% downlight and 20% uplight ratio for ceiling suspended mounting. Size: 1129x90x80mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. Constant current driver. 3000K Warm White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 4200lm. Power consumption 29W. Luminaire efficacy 145lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m², IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.

Atouts techniques

Dimensions (mm)

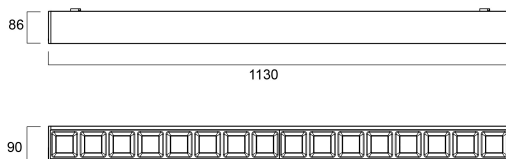

Photométrie



OPTIX LINEAR SURFACE 1200 D/I 3000K ALU

Code article 2023808

Concord

Données générales

Nom du produit	OPTIX LINEAR SURFACE 1200 D/I 3000K ALU
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Suspended
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Office, Education, Retail
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	145
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	29
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	8
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	600
Courant d'appel (A)	25
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	D, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	27
Max. products per 13A C Breaker	35
Max. products per 16A C Breaker	45
Max. products per 20A C Breaker	58
Max. products per 10A B Breaker	16
Max. products per 13A B Breaker	21
Max. products per 16A B Breaker	27
Max. products per 20A B Breaker	35
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

OPTIX LINEAR SURFACE 1200 D/I 3000K ALU

Code article 2023808

Concord

Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Finition réflecteur	High-gloss
Longueur (mm)	1129
Largeur (mm)	90
Nominal Product Height (mm)	80
Poids (kg)	3.5

Emballage

Product EAN number	5025768238088
Longueur simple de l'emballage (cm)	119.0
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	11.0
DUN14 (inner)	05025768238088
Units per outer package	1
Packaging outer length / height (cm)	119.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	11.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	10-25