


OPTIX RECESSED 600 2L LUMI 4K ALU DALI

Code article 2023833


Concord

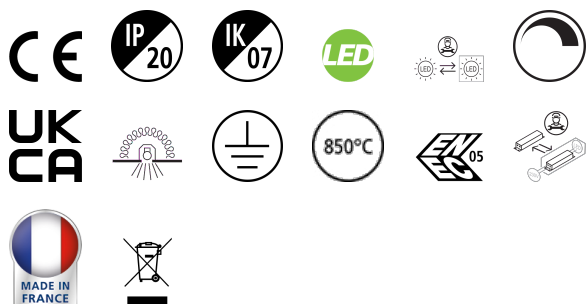

OPTIX RECESSED 600 2L LUMI 4000K ALU DALI is a ceiling recessed luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. DALI dimmable. 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 4000K - Colour rendering index $R_a > 98$; Melanopic Ratio MEER: 0.771; Fidelity Index R_f : 94; Gamut Index R_g : 98. For 4000K luminous flux: 2900lm. Power consumption: 30W. Luminaire efficacy: 97lm/W. $UGR < 16$ Luminance at $65^\circ < 200$ Cd/m², IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 60,000hrs L80B20 lifespan.


Atouts techniques

Dimensions (mm)

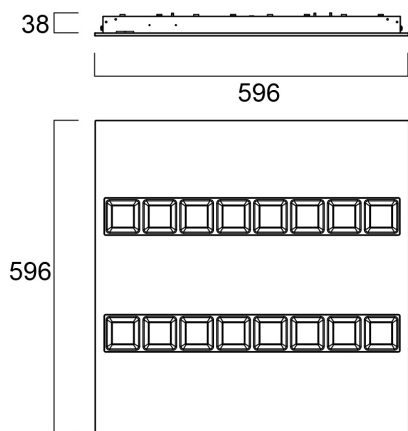

Photométrie

Distance (m)	Cone diameter (m)	Beam angle (°)	Beam diameter (m)	Beam area (m²)	Illuminance (lx)
0.5	0.78	75.0°	0.78	0.38	7522
1.0	1.56	75.0°	1.56	1.53	1917
1.5	2.34	75.0°	2.34	4.04	728
2.0	3.11	75.0°	3.11	9.61	302
2.5	3.89	75.0°	3.89	15.1	192
3.0	4.67	75.0°	4.67	21.7	134
3.5	5.45	75.0°	5.45	29.6	98
4.0	6.22	75.0°	6.22	38.7	75
4.5	7.00	75.0°	7.00	48.9	59
5.0	7.78	75.0°	7.78	60.2	48
5.5	8.56	75.0°	8.56	72.7	40
6.0	9.34	75.0°	9.34	86.4	33
6.5	10.12	75.0°	10.12	101.3	28
7.0	10.89	75.0°	10.89	117.5	25
7.5	11.67	75.0°	11.67	135.0	21
8.0	12.45	75.0°	12.45	153.8	19
8.5	13.22	75.0°	13.22	173.9	17
9.0	14.00	75.0°	14.00	195.3	15
9.5	14.78	75.0°	14.78	218.0	13
10.0	15.56	75.0°	15.56	242.0	12



OPTIX RECESSED 600 2L LUMI 4K ALU DALI

Code article 2023833

Concord

Données générales

Nom du produit	OPTIX RECESSED 600 2L LUMI 4K ALU DALI
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Office, Education
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	2915
Luminaire efficacy (lm/W)	97
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	98
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	30
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.99
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Drive current (mA)	200
Courant d'appel (A)	23
Inrush Duration (µs)	174
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

OPTIX RECESSED 600 2L LUMI 4K ALU DALI

Code article 2023833

Concord

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	60000

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Finition réflecteur	High-gloss
Longueur (mm)	596
Largeur (mm)	596
Nominal Product Height (mm)	38
Poids (kg)	5.0

Emballage

Product EAN number	5025768238330
Longueur simple de l'emballage (cm)	62.0
Largeur simple de l'emballage (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (inner)	05025768238330
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	10-25