


# OPTIX RECESSED 625 3L LUMI HCL TW ALU DALI

Code article 2023873


Concord

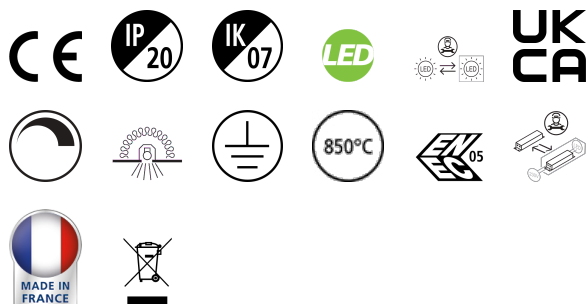

OPTIX RECESSED 625 3L LUMI HCL TW ALU DALI is a ceiling recessed luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. DALI DT8 controlled tunable white light engine. 2700-6200K Tunable White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 2700K - Colour rendering index Ra >98; Melanopic Ratio MEER: 0.528; Fidelity Index R<sub>f</sub>: 97; Gamut Index R<sub>g</sub>: 101. For 4000K - Colour rendering index Ra >96; Melanopic Ratio MEER: 0.822; Fidelity Index R<sub>f</sub>: 95; Gamut Index R<sub>g</sub>: 101. For 6200K - Colour rendering index Ra >99; Melanopic Ratio MEER: 1.077; Fidelity Index R<sub>f</sub>: 96; Gamut Index R<sub>g</sub>: 99. For 4000K luminous flux: 3500lm. Power consumption: 37W. Luminaire efficacy: 95lm/W. UGR<16 Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 68,000hrs L80B20 lifespan.


## Atouts techniques

### Dimensions (mm)

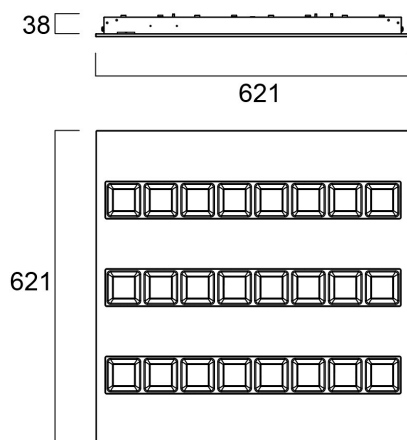

### Photométrie

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>10</sub> [lx]	E <sub>30</sub> [lx]
0.5	0.78	8746	2198	2198
	0.78	354"	88"	88"
1.0	1.59	2187	554	554
	1.56	88"	219"	219"
1.5	2.38	972	247	247
	2.34	39"	97"	97"
2.0	3.17	547	133	133
	3.11	219"	55"	55"
2.5	3.96	380	95	95
	3.89	151"	38"	38"
3.0	4.76	243	61	61
	4.67	98"	24"	24"



# OPTIX RECESSED 625 3L LUMI HCL TW ALU DALI

Code article 2023873

Concord

## Données générales

Nom du produit	OPTIX RECESSED 625 3L LUMI HCL TW ALU DALI
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	3510
Luminaire efficacy (lm/W)	95
Couleur de lumière	Tuneable White HCL
IRC (Ra)	95
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1

## Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	37
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Drive current (mA)	165
Courant d'appel (A)	23
Inrush Duration (µs)	290
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	13
Max. products per 16A C Breaker	19
Max. products per 10A B Breaker	11
Max. products per 16A B Breaker	19
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.75
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5
Durée de vie	
Lifespan L70 B50	100000
Lifespan L80 B20	68000

# OPTIX RECESSED 625 3L LUMI HCL TW ALU DALI

Code article 2023873

Concord

## Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Finition réflecteur	High-gloss
Longueur (mm)	621
Largeur (mm)	621
Nominal Product Height (mm)	38
Poids (kg)	5.0

## Emballage

Product EAN number	5025768238736
Longueur simple de l'emballage (cm)	67.0
Largeur simple de l'emballage (cm)	6.5
Packaging single depth (cm)	64.5
DUN14 (inner)	05025768238736
Units per outer package	1
Packaging outer length / height (cm)	67.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	64.5

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	10-25