


OPTIX SURFACE 1500 MPO D 4000K SSA03

Code article 2023911


Concord

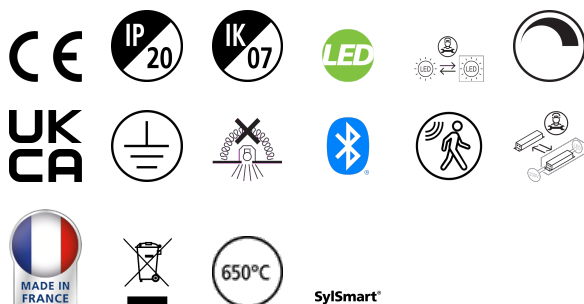

OPTIX SURFACE 1500 MPO D 4000K SSA03 is a high efficacy low glare surface or suspended LED Linear luminaire with Micro Prismatic diffuser, with direct light distribution, luminaire dimensions: 1500x200x50mm, Sylvania White body colour (RAL9016), IP20, IK07, Sylsmart Connected capable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4350lm luminous flux, 37W power consumption, 118lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m², lumen maintenance: L90B50 at 71000h, photobiological safety risk group 1. Electrical protection Class I.

Atouts techniques


Dimensions (mm)

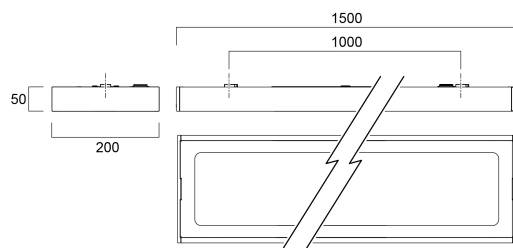

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam area [m²]	Beam flux [lm]	Beam illuminance [lx]
0.5	0.70	65.7°	0.65	0.33	1130	3430
1.0	1.41	65.7°	1.31	1.33	2540	1910
1.5	2.11	65.7°	1.96	3.85	1280	1280
2.0	2.81	65.7°	2.62	6.88	712	712
2.5	3.51	65.7°	3.28	10.75	496	496
3.0	4.22	65.7°	3.94	15.52	317	317

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 65.7°)
— C90 - C270 (Half beam angle: 70.2°)



OPTIX SURFACE 1500 MPO D 4000K SSA03

Code article 2023911

Concord

Données générales

Nom du produit	OPTIX SURFACE 1500 MPO D 4000K SSA03
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling surface mounting
Built in presence detector	PIR
General application	Office, Education
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4350
Luminaire efficacy (lm/W)	118
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG1

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	37
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	300
Courant d'appel (A)	27
Inrush Duration (µs)	175
Energy Efficiency Class (A->G) of contained light source	C, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	25
Max. products per 13A C Breaker	32
Max. products per 16A C Breaker	40
Max. products per 20A C Breaker	50
Max. products per 10A B Breaker	15
Max. products per 13A B Breaker	19
Max. products per 16A B Breaker	24
Max. products per 20A B Breaker	30
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

OPTIX SURFACE 1500 MPO D 4000K SSA03

Code article 2023911

Concord

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	71000

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Finition réflecteur	Not Applicable
Longueur (mm)	1500
Largeur (mm)	200
Nominal Product Height (mm)	58
Poids (kg)	5.7

Emballage

Product EAN number	5025768239115
Longueur simple de l'emballage (cm)	155.0
Largeur simple de l'emballage (cm)	9.0
Packaging single depth (cm)	21.0
DUN14 (inner)	05025768239115
Units per outer package	1
Packaging outer length / height (cm)	155.0
Packaging outer width (cm)	9.0
Packaging outer depth (cm)	21.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	10-25