


# MYRIAD HOUSING 2700K PHASE DIM EM

Code article 2057923


Concord

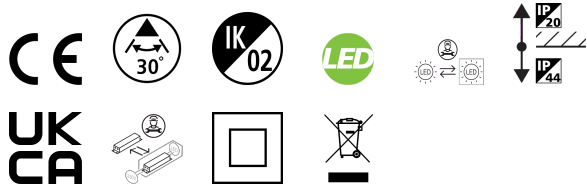

MYRIAD HOUSING 2700K PHASE DIM EM

## Atouts techniques

### Dimensions (mm)

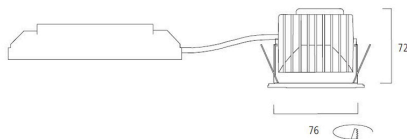


Dimensions (mm)

### Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [in]	Illuminance [lx]
0.5	0.33	Ø101	18.9"	1787
1.0	0.67	Ø202	38.9"	447
1.5	1.00	Ø303	58.9"	199
2.0	1.34	Ø404	78.9"	112
2.5	1.67	Ø505	98.9"	71
3.0	2.01	Ø606	118.9"	51

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 C0 - C180 (Half beam angle: 37.0°)

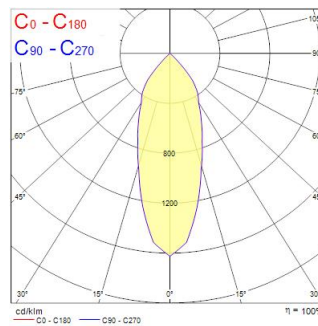

# MYRIAD HOUSING 2700K PHASE DIM EM

Code article 2057923

Concord

## Données générales

Nom du produit	MYRIAD HOUSING 2700K PHASE DIM EM
Technologie	LED
Cap/Base	N/A
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	791
Luminaire efficacy (lm/W)	66
LOR (%)	100
Température de couleur (K)	2700
Couleur de lumière	Candlelight
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Chromaticité réglable	N
Beam Angle (°)	30
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	275

## Caractéristiques électriques

Consommation électrique totale (W)	16
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Dimming method	Other
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

## Données physiques

IP rating	IP44/20
IK rating	IK02
Largeur (mm)	76
Nominal Product Height (mm)	72
Poids (kg)	1.37
Recessed Depth (mm)	72

## Emballage

Product EAN number	5025768579235
Longueur simple de l'emballage (cm)	17.5
Largeur simple de l'emballage (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (inner)	05025768579235
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5