


MYRIAD DECO IP65 FLOOD 4000K DALI BLACK CBEZ

Code article 2058973


Concord

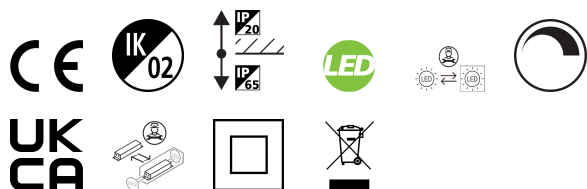

MYRD IP FL 4K DALI BLK CBEZ

Atouts techniques

Dimensions (mm)

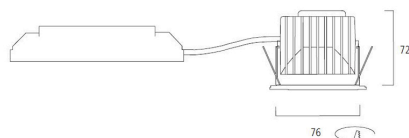


Dimensions (mm)

Photométrie

| Distance [m] | Cone diameter [m] | Beam diameter [m] | Beam diameter [in] | Illuminance [lx] |
|--------------|-------------------|-------------------|--------------------|------------------|
| 0.5 | 0.32 | 0.32 | 12.6" | 836 3621 |
| 1.0 | 0.63 | 0.63 | 25.2" | 209 910 |
| 1.5 | 0.95 | 0.95 | 37.8" | 91 402 |
| 2.0 | 1.27 | 1.27 | 50.4" | 52 228 |
| 2.5 | 1.59 | 1.59 | 63.0" | 33 140 |
| 3.0 | 1.90 | 1.90 | 75.6" | 23 101 |

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 35.2°)

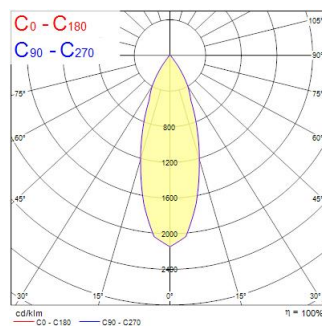

MYRIAD DECO IP65 FLOOD 4000K DALI BLACK CBEZ

Code article 2058973

Concord

Données générales

| | |
|---|---|
| Nom du produit | MYRIAD DECO IP65 FLOOD 4000K DALI BLACK CBEZ |
| Technologie | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Montage | Ceiling recessed mounting |
| Environment | Interior |
| General application | Hospitality, Office, Residential & Consumer, Retail |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM Class | EC001744 |
| Warranty | 5 ans |

Données optiques

| | |
|---------------------------------|---------------|
| Fixture luminous flux (lm) | 977 |
| Luminaire efficacy (lm/W) | 98 |
| LOR (%) | 100 |
| Température de couleur (K) | 4000 |
| Couleur de lumière | Neutral White |
| IRC (Ra) | 90 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Chromaticité réglable | N |
| Beam Angle (°) | 46 |
| Photobiological Risk Group | RG1 |

Caractéristiques électriques

| | |
|--|----------------------------------|
| Consommation électrique totale (W) | 10 |
| Primary Supply/Product voltage - min (V) | 230 |
| Primary Supply/Product voltage - max (V) | 240 |
| Electrical protection | Class II |
| Type d'appareillage | Electronic ballast |
| Dimmable | Yes |
| Dimming method | DALI-2, Switch-dim (mains-rated) |
| Minimum dimming level (%) | 1 |
| Drive current (mA) | 250 |
| Energy Efficiency Class (A->G) of contained light source | E |
| Nominal Frequency (Hz) | 50/60Hz |

Durée de vie

| | |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B20 | 100000 |
| Lifespan L90 B10 | 68500 |

Données physiques

| | |
|-------------------------------|-----------------|
| Housing colour | Black |
| IP rating | IP65/20 |
| IK rating | IK02 |
| Diffuser finish | Bezel (or Ring) |
| Nominal Product Height (mm) | 72 |
| Nominal Product Diameter (mm) | 90 |
| Poids (kg) | 0.44 |
| Recessed Depth (mm) | 72 |

MYRIAD DECO IP65 FLOOD 4000K DALI BLACK CBEZ

Code article 2058973

Concord

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5025768589739 |
| Longueur simple de l'emballage (cm) | 17.5 |
| Largeur simple de l'emballage (cm) | 15.0 |
| Packaging single depth (cm) | 17.5 |
| DUN14 (inner) | 05025768589739 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 17.5 |
| Packaging outer width (cm) | 15.0 |
| Packaging outer depth (cm) | 17.5 |