

Beacon WallWasher 3000K L3 Black

Code article 2059065


Concord




Integrated LED spotlight, black, compact and minimalist design, ideal for museum, gallery and display applications, die-cast aluminium body, passive cooling heatsink, uniform ceiling to floor vertical illuminance up to 4m height and 4.5m horizontal spread, beam angle: asymmetric wallwash, optics: asymmetric glass lens, colour temperature: 3000K warm white, total system power: 48W, total fixture output: 3823lm, luminaire efficacy: 80lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, switched only, electrical protection: CLASS I, 3-circuit track adaptor, suitable for OneTrack, Global Trac, Concord Lytespan 3 track (please check track compatibility list), ingress protection rating: IP20, suitable for internal environment only.

Atouts techniques

Dimensions (mm)

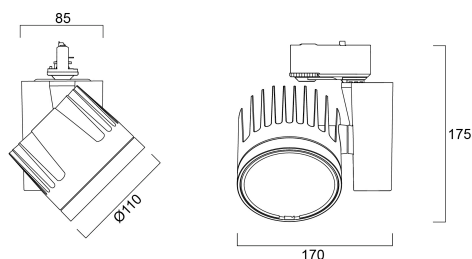

Photométrie



Beacon WallWasher 3000K L3 Black

Code article 2059065

Concord

Données générales

Nom du produit	Beacon WallWasher 3000K L3 Black
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4276797
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3823
Luminaire efficacy (lm/W)	80
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	93
Colour Consistency (SDCM)	3
Chromaticité réglable	N
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	48
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.98
Electrical protection	Class I
Type d'appareillage	Electronic ballast
Dimming method	N/A
Drive current (mA)	1200
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Données physiques

Housing colour	Black
IP rating	IP20
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Longueur (mm)	85
Largeur (mm)	170
Nominal Product Height (mm)	175

Emballage

Product EAN number	5025768590650
Longueur simple de l'emballage (cm)	25.0
Largeur simple de l'emballage (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (inner)	05025768590650
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0