

BEACON WW LED DALI 3K L3 BLK

Code article 2059073


Concord




2059073 BEACON WW LED DALI 3K L3 BLK Integrated LED spotlight, black RAL 9005, compact and minimalist design, ideal for museum, gallery and display applications, die-cast aluminium body, passive cooling heatsink, uniform ceiling to floor vertical illuminance up to 4m height and 4.5m horizontal spread, beam angle: asymmetric wallwash, optics: asymmetric glass lens, colour temperature: 3000K warm white, total system power: 48W, total fixture output: 3823lm, luminaire efficacy: 80lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, DALI dimmable, power factor: 0.95, electrical protection: CLASS I, DALI track adaptor, suitable for Concord Lytespan DALI track, ingress protection rating: IP20. IMPORTANT NOTE: This fixture can only be used on the Lytespan DALI or Lytebeam DALI tracks !

Atouts techniques

Dimensions (mm)

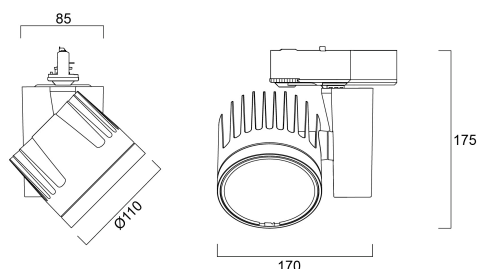

Photométrie

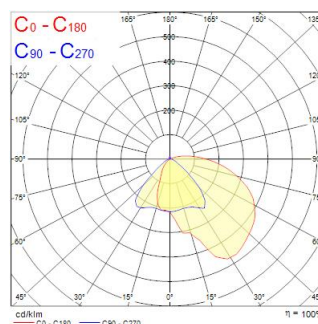

BEACON WW LED DALI 3K L3 BLK

Code article 2059073

Concord

Données générales

Nom du produit	BEACON WW LED DALI 3K L3 BLK
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3823
Luminaire efficacy (lm/W)	80
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	93
Colour Consistency (SDCM)	3
Chromaticité réglable	N
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	48
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
Electrical protection	Class I
Type d'appareillage	Electronic ballast
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	1200
Courant d'appel (A)	30
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A B Breaker	13
Max. products per 16A B Breaker	20

Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	100000
Lifespan L90 B50	89000
Lifespan L90 B20	80100
Lifespan L90 B10	72000

BEACON WW LED DALI 3K L3 BLK

Code article 2059073

Concord

Données physiques

Housing colour	Black
IP rating	IP20
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Longueur (mm)	85
Largeur (mm)	170
Nominal Product Height (mm)	175
Poids (kg)	1.65

Emballage

Product EAN number	5025768590735
Longueur simple de l'emballage (cm)	25.0
Largeur simple de l'emballage (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (inner)	05025768590735
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0