

# Beacon WallWasher On-Board Dim 4000K L3 White

Code article 2059088


Concord




Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for museum, gallery and display applications, die-cast aluminium body, passive cooling heatsink, uniform ceiling to floor vertical illuminance up to 4m height and 4.5m horizontal spread, beam angle: asymmetric wallwash, optics: asymmetric glass lens, colour temperature: 4000K warm white, total system power: 48W, total fixture output: 4089lm, luminaire efficacy: 85lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, dimmable, on-board potentiometer for dimming control, electrical protection: CLASS I, 3-circuit track adaptor, suitable for OneTrack, Global Trac, Concord Lytespan 3 track (please check track compatibility list), ingress protection rating: IP20, suitable for internal environment only.

## Atouts techniques

### Dimensions (mm)

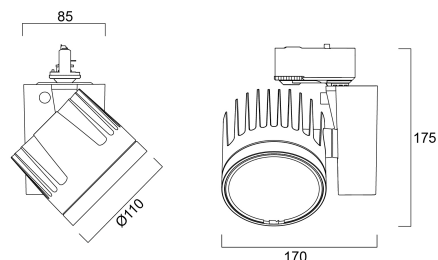

### Photométrie



# Beacon WallWasher On-Board Dim 4000K L3 White

Code article 2059088

Concord

## Données générales

|                                         |                                               |
|-----------------------------------------|-----------------------------------------------|
| Nom du produit                          | Beacon WallWasher On-Board Dim 4000K L3 White |
| Technologie                             | LED                                           |
| Cap/Base                                | N/A                                           |
| Housing                                 | Aluminium                                     |
| Montage                                 | Track mounting                                |
| Environnement                           | Internal                                      |
| General application                     | Museums & Galleries, Retail                   |
| Performance ambient temperature Tq (°C) | 25                                            |
| ETIM Class                              | EC001744                                      |
| Numéro virtuel FI                       | 4276813                                       |
| Warranty                                | 5 ans                                         |

## Données optiques

|                            |               |
|----------------------------|---------------|
| Fixture luminous flux (lm) | 4089          |
| Luminaire efficacy (lm/W)  | 85            |
| LOR (%)                    | 100           |
| Température de couleur (K) | 4000          |
| Couleur de lumière         | Neutral White |
| IRC (Ra)                   | 93            |
| Colour Consistency (SDCM)  | 3             |
| Chromaticité réglable      | N             |
| Photobiological Risk Group | RG1           |

## Caractéristiques électriques

|                                                          |                                |
|----------------------------------------------------------|--------------------------------|
| Consommation électrique totale (W)                       | 48                             |
| Primary Supply/Product voltage - min (V)                 | 220.0                          |
| Primary Supply/Product voltage - max (V)                 | 240.0                          |
| Lamp power factor                                        | 0.98                           |
| Electrical protection                                    | Class I                        |
| Type d'appareillage                                      | Electronic ballast             |
| Dimmable                                                 | Yes                            |
| Dimming method                                           | Mains: leading / trailing edge |
| Minimum dimming level (%)                                | 1                              |
| Drive current (mA)                                       | 1200                           |
| Energy Efficiency Class (A->G) of contained light source | E                              |
| Nominal Frequency (Hz)                                   | 50/60Hz                        |

## Données physiques

|                             |                  |
|-----------------------------|------------------|
| Housing colour              | White            |
| IP rating                   | IP20             |
| Diffuser finish             | Diffuse          |
| Diffuser material           | PC Polycarbonate |
| Finition réflecteur         | Not Applicable   |
| Longueur (mm)               | 85               |
| Largeur (mm)                | 170              |
| Nominal Product Height (mm) | 175              |

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5025768590889  |
| Longueur simple de l'emballage (cm)  | 25.0           |
| Largeur simple de l'emballage (cm)   | 19.5           |
| Packaging single depth (cm)          | 20.0           |
| DUN14 (inner)                        | 05025768590889 |
| Units per outer package              | 1              |
| Packaging outer length / height (cm) | 25.0           |
| Packaging outer width (cm)           | 19.5           |
| Packaging outer depth (cm)           | 20.0           |