

# BEACON WW LED HO 4K L3 WHT

Code article 2059109


Concord




2059109 BEACON WW LED HO 4K L3 WHT Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for museum, gallery and display applications, die-cast aluminium body, passive cooling heatsink, uniform ceiling to floor vertical illuminance up to 4m height and 4.5m horizontal spread, beam angle: asymmetric wallwash, optics: asymmetric glass lens, colour temperature: 4000K warm white, total system power: 48W, total fixture output: 4916lm, luminaire efficacy: 102lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, non-dimmable, switched only, power factor: 0.98, electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotatio...

## Atouts techniques

### Dimensions (mm)

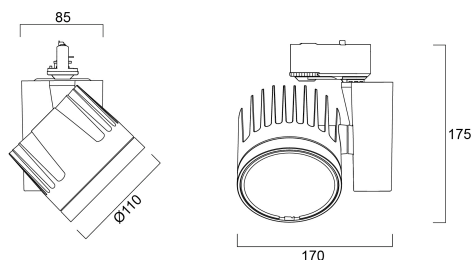

### Photométrie



# BEACON WW LED HO 4K L3 WHT

Code article 2059109

Concord

## Données générales

Nom du produit	BEACON WW LED HO 4K L3 WHT
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4276819
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	4916
Luminaire efficacy (lm/W)	102
LOR (%)	100
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	85
Colour Consistency (SDCM)	3
Chromaticité réglable	N
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	48
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	1
Electrical protection	Class I
Type d'appareillage	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	1200
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz

## Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	100000
Lifespan L90 B50	89000
Lifespan L90 B20	80100
Lifespan L90 B10	72000

## Données physiques

Housing colour	White
IP rating	IP20
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Longueur (mm)	85
Largeur (mm)	170
Nominal Product Height (mm)	175
Poids (kg)	1.65

# BEACON WW LED HO 4K L3 WHT

Code article 2059109

**Concord**

## Emballage

Product EAN number	5025768591091
Longueur simple de l'emballage (cm)	25.0
Largeur simple de l'emballage (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (inner)	05025768591091
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0