


ASCENT 150 II 3900 4K STD

Code article 2059368

Concord

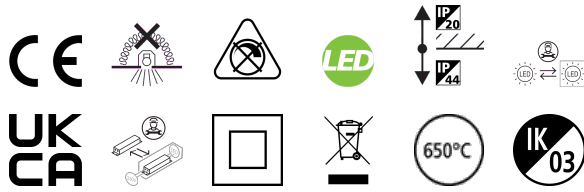

The ASCENT 150 II 3900 4K STD is a high efficient downlight luminaire, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Class II, Protection rating IP44/IK03

Atouts techniques


Dimensions (mm)



Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.50	42.1°	805 1854
1.0	1.01	42.1°	204 471
1.5	1.51	42.1°	89 209
2.0	2.01	42.1°	53 118
2.5	2.52	42.1°	32 73
3.0	3.02	42.1°	22 51

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 84.2°)



ASCENT 150 II 3900 4K STD

Code article 2059368

Concord

Données générales

Nom du produit	ASCENT 150 II 3900 4K STD
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting
Built in presence detector	NONE
Environment	Internal
General application	Hospitality, Office, Retail
Operating temperature range (°C)	25°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	139
LOR (%)	100
Température de couleur (K)	4000
IRC (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Chromaticité réglable	N
Beam Angle (°)	80
Distribution type	Diffuse
Glare control	< 23
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	28
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x %	20
Electrical protection	Class II
Type d'appareillage	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	1050
Courant d'appel (A)	10
Inrush Duration (μ s)	100
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60/HF
Max. products per 10A C Breaker	35
Max. products per 13A C Breaker	50
Max. products per 16A C Breaker	65
Max. products per 20A C Breaker	75
Max. products per 10A B Breaker	35
Max. products per 13A B Breaker	50
Max. products per 16A B Breaker	65
Max. products per 20A B Breaker	75
Connectable conductor cross section - Min (mm ²)	1
Connectable conductor cross section - Max (mm ²)	1

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	55000

ASCENT 150 II 3900 4K STD

Code article 2059368

Concord

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Finition réflecteur	Other
Largeur (mm)	189
Nominal Product Height (mm)	107
Nominal Product Diameter (mm)	189
Poids (kg)	1.03
Recessed Depth (mm)	120

Emballage

Product EAN number	5025768593682
Longueur simple de l'emballage (cm)	25.0
Largeur simple de l'emballage (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (inner)	05025768593682
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	25-25