


# ASCENT 100 II ARCH 1000 4K STD 160

Code article 2060545


# Concord

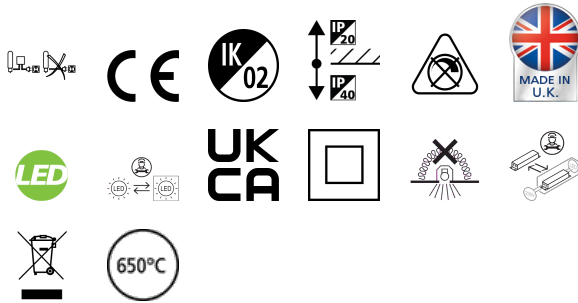

The ASCENT 100 II ARCH 1000 4K STD 160 is a high efficient non dimmable downlight luminaire, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 178mm. Additional accessories of diffusers and plaster in available.

## Atouts techniques


### Dimensions (mm)

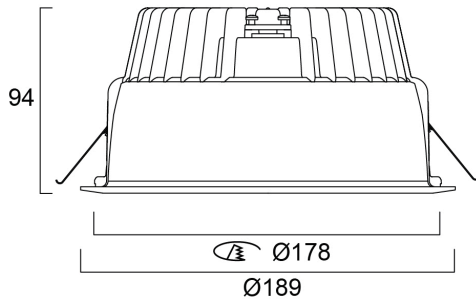

### Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.10	51°	173
1.0	2.19	41°	43
1.5	3.29	31°	19
2.0	4.38	23°	11
2.5	5.48	18°	7
3.0	6.57	14°	5

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 95.2°)



# ASCENT 100 II ARCH 1000 4K STD 160

Code article 2060545

Concord

## Données générales

Nom du produit	ASCENT 100 II ARCH 1000 4K STD 160
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality, Office, Retail
Operating temperature range (°C)	25°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	1009
Luminaire efficacy (lm/W)	144
LOR (%)	100
Température de couleur (K)	4000
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	85
Distribution type	Diffuse
Glare control	< 22
Photobiological Risk Group	RG0

## Caractéristiques électriques

Consommation électrique totale (W)	7
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.90
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	15
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	Electronic ballast
Montage de l'appareillage	Remote
Dimmable	No
Dimming method	N/A
Drive current (mA)	150
Courant d'appel (A)	8
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	60
Max. products per 10A B Breaker	38
Max. products per 16A B Breaker	60
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5
<b>Durée de vie</b>	
Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	58000

# ASCENT 100 II ARCH 1000 4K STD 160

Code article 2060545

Concord

## Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PMMA Acrylic
Finition réflecteur	High-gloss
Nominal Product Height (mm)	94
Nominal Product Diameter (mm)	189
Poids (kg)	1.2

## Emballage

Product EAN number	5025768605453
Longueur simple de l'emballage (cm)	25.0
Largeur simple de l'emballage (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (inner)	05025768605453
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	25-25