



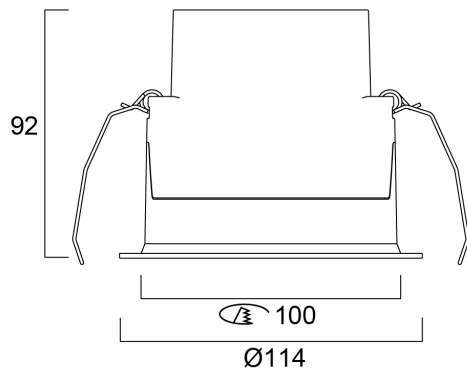

0.5	0.57	20°	29.9°	549
1.0	1.15	20°	29.9°	1524
1.5	1.72	20°	29.9°	732
2.0	2.29	20°	29.9°	405
2.5	2.86	20°	29.9°	260
3.0	3.44	20°	29.9°	190

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (half beam angle: 59.6°)

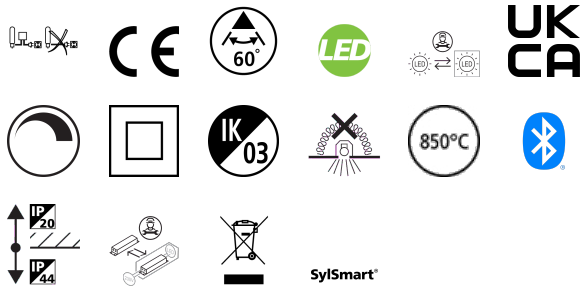