

# Concord Beacon Muse 4000k SM O/B Dim White

Code article 2062567


**Concord**



Simple and slick integral design with no driver box and without any visible screws New technology utilization for improved performance Extremely precise light beams due to the high-quality lens ø80mm die-cast aluminium body, Adjustable beam angle: between 8° - 55°, Textured white finishing colour Light color temperature: 4000K, natural light System power: 18W, Fixture lumen output: 1100lm, efficacy: 61lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, dimmable via on-board potentiometer, Surface mounting with surface mounting base. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 355°, vertical tilt: 90° Nominal product dimensions: D.80mmx215mm 5 years warranty. Suitable for ceiling surface mounting, and wall surface mounting

## Atouts techniques


### Dimensions (mm)

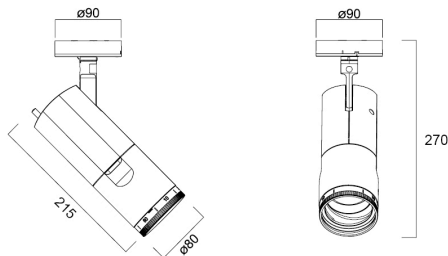

### Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.05	Ø171	4.3°	4100
		Ø129	4.3°	3100
1.0	0.15	Ø171	4.3°	1540
		Ø129	4.3°	850
1.5	0.23	Ø171	4.3°	658
		Ø129	4.3°	284
2.0	0.30	Ø171	4.3°	395
		Ø129	4.3°	130
2.5	0.38	Ø171	4.3°	267
		Ø129	4.3°	81
3.0	0.45	Ø171	4.3°	182
		Ø129	4.3°	51

Distance [m] Cone diameter [m] Illuminance [lx]  
 — C0 - C180 (Half beam angle: 8.6°)



# Concord Beacon Muse 4000k SM O/B Dim White

Code article 2062567

# Concord

## Données générales

Nom du produit	Concord Beacon Muse 4000k SM O/B Dim White
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling surface mounting, Wall surface mounted
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Museums & Galleries, Retail, Hospitality
Operating temperature range (°C)	-10°C...+35°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	61
LOR (%)	100
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	97
Colour Variation Initial (SDCM)	SDCM2
Luminous Intensity (cd)	1100
Distribution type	Symmetric
Photobiological Risk Group	RG1

## Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	18
Actuel (A)	0.082
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	7.9
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	Onboard pot
Minimum dimming level (%)	1
Drive current (mA)	500
Courant d'appel (A)	5
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	31
Max. products per 13A C Breaker	65
Max. products per 16A C Breaker	85
Max. products per 20A C Breaker	104
Max. products per 10A B Breaker	31
Max. products per 13A B Breaker	39
Max. products per 16A B Breaker	50
Max. products per 20A B Breaker	62

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B50	100000
Lifespan L90 B50	49000

# Concord Beacon Muse 4000k SM O/B Dim White

Code article 2062567

**Concord**

## Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Frosted
Diffuser material	Other
Finition réflecteur	Matt
Longueur (mm)	215
Largeur (mm)	80
Nominal Product Height (mm)	270
Poids (kg)	1.02

## Emballage

Product EAN number	5025768625673
Longueur simple de l'emballage (cm)	30.5
Largeur simple de l'emballage (cm)	13.5
Packaging single depth (cm)	20.5
DUN14 (inner)	05025768625673
Units per outer package	1
Packaging outer length / height (cm)	30.5
Packaging outer width (cm)	13.5
Packaging outer depth (cm)	20.5

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-35
Utilisation pour applications sèches uniquement	Yes